

TÜV NORD (Hangzhou) Co., Ltd.

Room B409, Building 1, No. 9,
Jiuhuan Road, Shangcheng
District, Hangzhou City, Zhejiang
Province, 310019, P.R. China

Phone: +86 (0) 571 8538 6989
Fax: +86 (0) 571 8538 6986

hzpcert@tuv-nord.com
www.tuv-nord.com/cn

Test Report No. 492014271.001

**Qualification for Rechargeable Li-ion Battery System
according to EN 62477-1:2012+A12:2021**

Applicant: Shenzhen EEnovance Energy Technology CO., LTD
Room 401, Building 2, Yufengda Industrial Park, No. 1008,Guangqiao
Avenue, Yulv Community, Yutang Streets,Guangming District, Shenzhen,
P.R. China

File No.: PVP04118/26E-012

All copyright and joint copyrights with respect to studies, assessments, test results, calculations, presentations, etc., drafted by TÜV NORD (Hangzhou) Co., Ltd. shall remain the property of TÜV NORD (Hangzhou) Co., Ltd. TÜV NORD (Hangzhou)'s contractual partner may use assessments, studies, test results, calculations, presentations, etc., drafted within the scope of the contract only for the purpose agreed in the contract or agreement. It is not permissible to pass on to third parties the reports, assessments, test results, calculations, presentations, etc., drawn up by TÜV NORD (Hangzhou) Co., Ltd. or to publish them in abridged form, unless the parties to the contract have concluded a written agreement on the passing on, presentation or publication of extracts from them.

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

Applicant.....:	Shenzhen EEnovance Energy Technology CO., LTD Room 401, Building 2, Yufengda Industrial Park, No. 1008,Guangqiao Avenue, Yulv Community, Yutang Streets,Guangming District, Shenzhen, P.R. China
Manufacturer.....:	Shenzhen EEnovance Energy Technology CO., LTD Room 401, Building 2, Yufengda Industrial Park, No. 1008,Guangqiao Avenue, Yulv Community, Yutang Streets,Guangming District, Shenzhen, P.R. China
Factory.....:	Dongguan EEnovance Energy Technology Co., Ltd. Room 501, Building1, Songhu Zhigu Science and Technology Industrial Park, No.11, LiaobuYanhe Road, Liaobu Town, Dongguan City, Guangdong Province, P.R. China
Order No.....:	HZHVPVP04118/26E
Date of Application [YYYY-MM-DD].....:	2026-04-23
Product.....:	Rechargeable Li-ion Battery System
Model type(s).....:	1) E-MATE 80-A, 2) E-MATE 96-A, 3) E-MATE 112-A, 4) E-MATE 128-A
Type of examination.....:	Commission testing only
Certification program.....:	P31-VA-01 Rev. 03 / 02.25
Certification fundamental(s).....:	EN 62477-1:2012+A12:2021
Testing Period [YYYY-MM-DD] start/end.....:	2026-05-28/2026-06-08
Testing Location.....:	Jiangsu Hazure Electronic Technology Co., Ltd. North of Dongting Lake Road and East of Huanghai Road, Economic Development Zone, Hongze District, Huai'an City, Jiangsu Province, China.

Test results listed in this test report refer exclusively to the mentioned test sample.

Partly copying is not permitted without explicit agreement of the owner.

The submitted test samples as described in the reports hereunder are in compliance with the requirements:
EN 62477-1:2012+A12:2021 "Safety requirements for power electronic converter systems and equipment –
Part 1: General requirements"

List of contents

List of contents 3

General remarks 10

General product information 11

Test results 15

Annex 1: Constructional Data Form (CDF)..... 75

Annex 2: Test records 76

Annex 3: List of equipment 88

Annex 4: Photos 89

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

History of certification	
File no..... :	N/A
Certificate no..... :	N/A
Date of issue..... :	N/A
Report no..... :	N/A
Type designation(s) :	N/A
Description:..... :	N/A
Supplementary information: Basic project, no history of certification.	

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

Summary of testing

According to the enquiry of the applicant, a qualification testing was performed for Rechargeable Li-ion Liquid-cooled Energy Storage System according to EN 62477-1:2012+A12:2021

Tests performed (name of test and test clause):

- cl. 5.2.2.1 Clearance and creepage distances test
- cl. 5.2.2.2 Non-accessibility test
- cl. 5.2.2.3 Ingress protection test (IP rating)*
- cl. 5.2.2.4.2.2 Steady force test, 30N
- cl. 5.2.2.4.2.3 Steady force test, 250N
- cl. 5.2.2.5 Stability test
- cl. 5.2.2.7 Handles and manual control securement test
- cl. 5.2.3.2 Impulse voltage test
- cl. 5.2.3.4 a.c. or d.c. voltage test
- cl. 5.2.3.6 Protective impedance test
- cl. 5.2.3.7 Touch current measurement test
- cl. 5.2.3.10 Temperature rise test
- cl. 5.2.3.11 Protective equipotential bonding test
- cl. 5.2.4.4 Output short circuit tests
- cl. 5.2.4.5 Output overload tests
- cl. 5.2.4.6 Breakdown of components tests
- cl. 5.2.4.9 Cooling failure tests
- cl. 5.2.6.3.1 Dry heat test
- cl. 5.2.6.3.2 Damp heat test
- cl. 5.2.6.4 Vibration test*

Remark: If not specified, the tests were conducted on representative Rechargeable Li-ion Battery System model E-MATE 128-A.

Testing location:

Clause 5.2.6.4 Vibration test for battery pack E-MATE-16-QC was performed in Shenzhen TCT Testing Technology Co., Ltd.

Report No.: TCT260228B007

Clause 5.2.2.3 Ingress protection test was performed at Jiangsu Product Quality Testing&Inspection Institute

Report No.: (2026) SJZWJ-WT01622


Other tests were performed in Jiangsu Hazure Electronic Technology Co., Ltd.

Test Report


File No.: PVP02045/25E-002

Test Report No.: 492014271.001

Copy of marking plate:

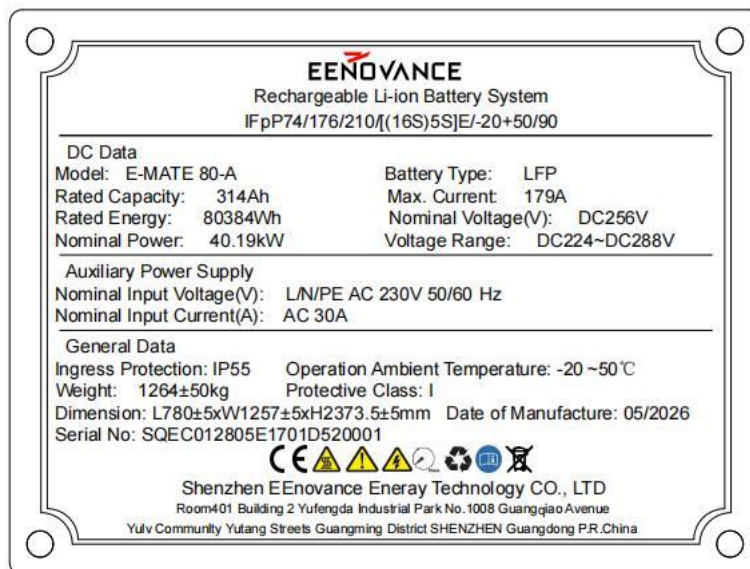

Label of the battery system with model E-MATE 80-A

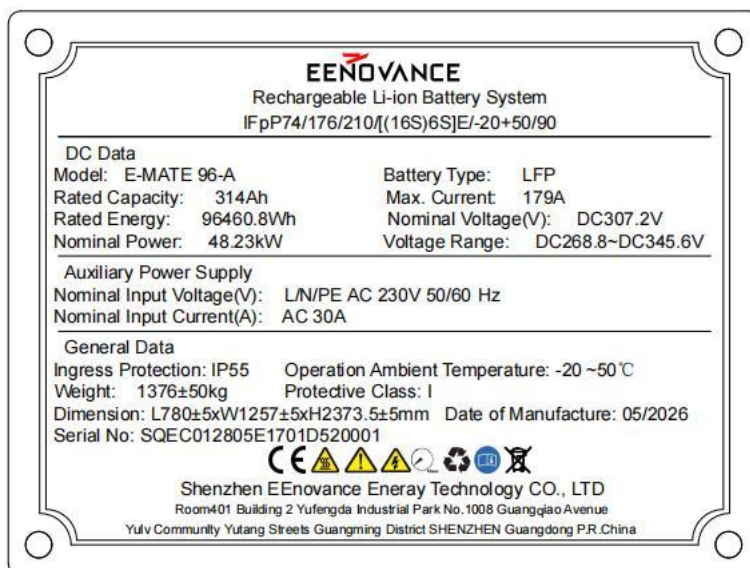


Label of the battery system with model E-MATE 96-A


Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

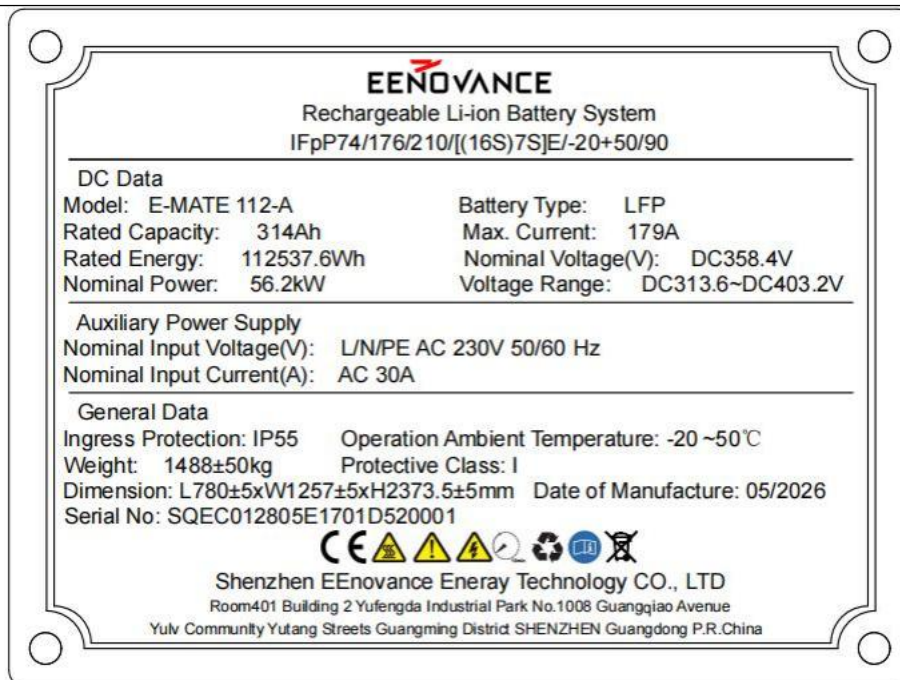

Label of the battery system with model E-MATE 112A

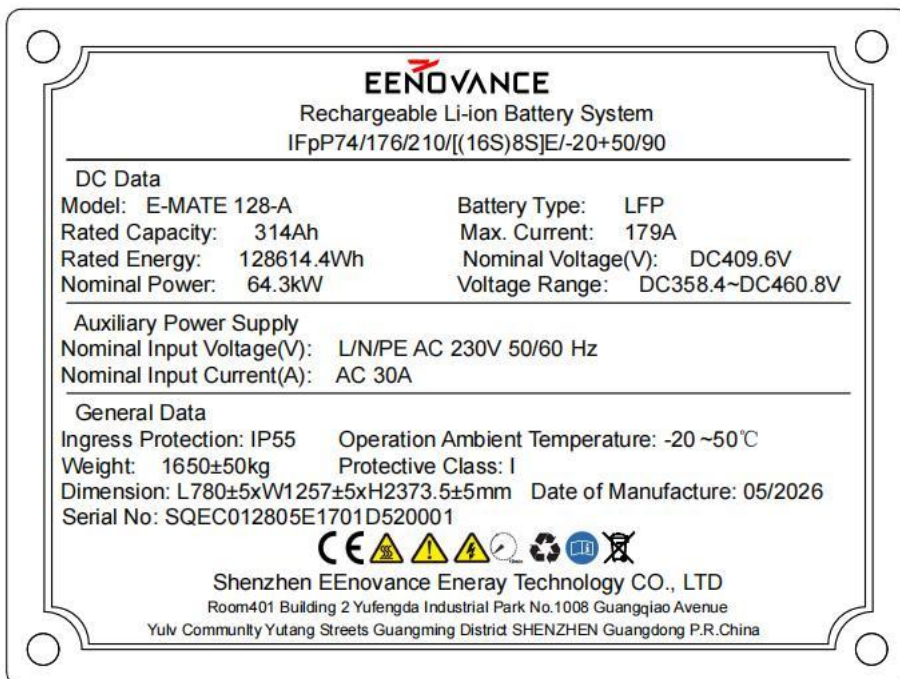

Label of the battery system with model E-MATE 128-A

Remark:

1) Example of SN code:

SQEC011205E1701D520001/SQEC012805E1701D520001/SQEC014405E1701D520001/SQEC016005E1701D520001/SQEC017605E1701D520001/SQEC019205E1701D520001/SQEC020805E1701D520001/SQEC022505E1701D520001/ SQEC024105E1701D520001/SQEC025705E1701D520001

Bit 1~4, Company model identification

Bit 5~8, System energy

Bit 9~10, 0.5P discharge rate

Bit 11~13, Product serial number

Bit 14~15, Integrated factory code

Bit 16, Production year, "A" stand for 2023, "B" stand for 2024, ..., "D" stand for 2026, ...

Bit 17, Production month, "5" stand for May, "6" stand for Jun., ..., "A" stand for Oct., ...

Bit 18~19, Production date, "20" stand for 20th.

Bit 20~22, Serial number

2) Example of Date of manufacture: 05/2026

"05" represents the month, such as 01, 02, 03, 04, 05, ..., 12

"2026" represents the year, such as 2024, 2025, 2026, ...

3) Calculated rated capacity:

Measured rated capacity of module: 314Ah

Number of modules connected in parallel: 1

Calculated rated capacity (Ah) = 314Ah x 1 = 314Ah

4) "P+", "P-", "B+", "B-" are marked near the polarity of the Rechargeable Li-ion Battery System, "+" positive electrode; "-" negative electrode.

5) The code "SQEC011205E1701D520001" can trace the manufacture information of the Rechargeable Li-ion Battery System. This is not the actual code and only for example.

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

General remarks

Possible test case verdicts:	
Test case does not apply to the test object.....:	Not Applicable (N/A)
Test object does meet the requirement..... :	Pass (P)
Test object does not meet the requirement.....:	Fail (F)
Other remarks:	
The test verdicts presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory. “(see Annex #)” refers to additional information appended to the report. “(see Table #)” refers to a table appended to the report. Throughout this report, a point is used as the decimal separator.	

General product information**Product Description:**

The Rechargeable Li-ion Battery System is used in energy storage applications.

Rechargeable Li-ion Battery System series models: 1) E-MATE 80-A, 2) E-MATE 96-A, 3) E-MATE 112-A, 4) E-MATE 128-A.

The battery module of model E-MATE-16-QC is composed of 16lithium-ion cells (16S).

The Rechargeable Li-ion Battery System consists of 1 high voltage box E-MATE-BCU-N-QC and 5 to 8 battery modules E-MATE-16-QC connected in series, which corresponds to 4 models of E-MATE 80-A, E-MATE 96-A, E-MATE 112-A, and E-MATE 128-A. The Rechargeable Li-ion Battery System has the same topology, construction, hardware and software except for the difference in cell number, battery configuration, voltage, and weight.

The Integrated energy storage system has protection functions against over-charge, over-discharge, over-current, over-temperature and short-circuit.

The enclosure of Rechargeable Li-ion Liquid-cooled Energy Storage System was evaluated to establish an IP rating of IP54 with the Standard for Degrees of Protection Provided by Enclosure (IP Code), IEC 60529.

Report No.: (2026) SJZWJ-WT01622, issued by Jiangsu Product Quality Testing&Inspection Institute.


The Rechargeable Li-ion Battery System can be used at specified ambient range. Operating temperature range: -20°C to +50°C, altitude: ≤4000m, outdoor use.

The Rechargeable Li-ion Battery also equipped subsystem with Battery Management System (BMS), Thermal Management System, Fire Suppression System (FSS), Energy Management System (EMS) and other auxiliary equipment.


List of subsystems

Subsystem	Component Function
Battery Rack	-
-High-voltage Control Box	The High-voltage Box of the energy storage system in the high-voltage power circuit management unit for air cooled industrial and commercial battery systems. It serves as the intermediary unit connecting the battery cluster and the energy storage converter.
-Battery pack	The battery module of model E-MATE-16-QC composed of 16 lithium-ion cells 16S (cell type PC-0B1-72174L4-BE).
--Cooling fan	Rechargeable Li-ion Battery System uses air cooling to control the temperature. The fans are used to realize the effective temperature control of the internal battery core of the battery system, so that the working environment of the battery system is within the best range, and the service life of the entire system is prolonged and the operation is safe and reliable.
Battery management system	Adopting a two-level management architecture and three-level software protection, including module level and battery cluster level, to achieve comprehensive control, management and protection of the Rechargeable Li-ion Battery System to ensure the safe and stable operation of the Rechargeable Li-ion Battery System.

Block Diagram:

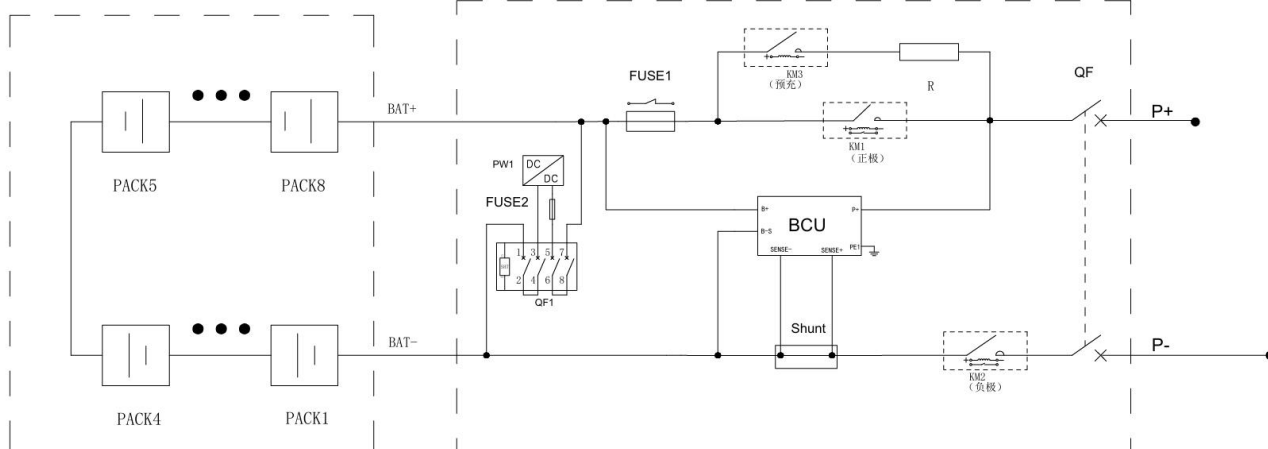

Structure chart:

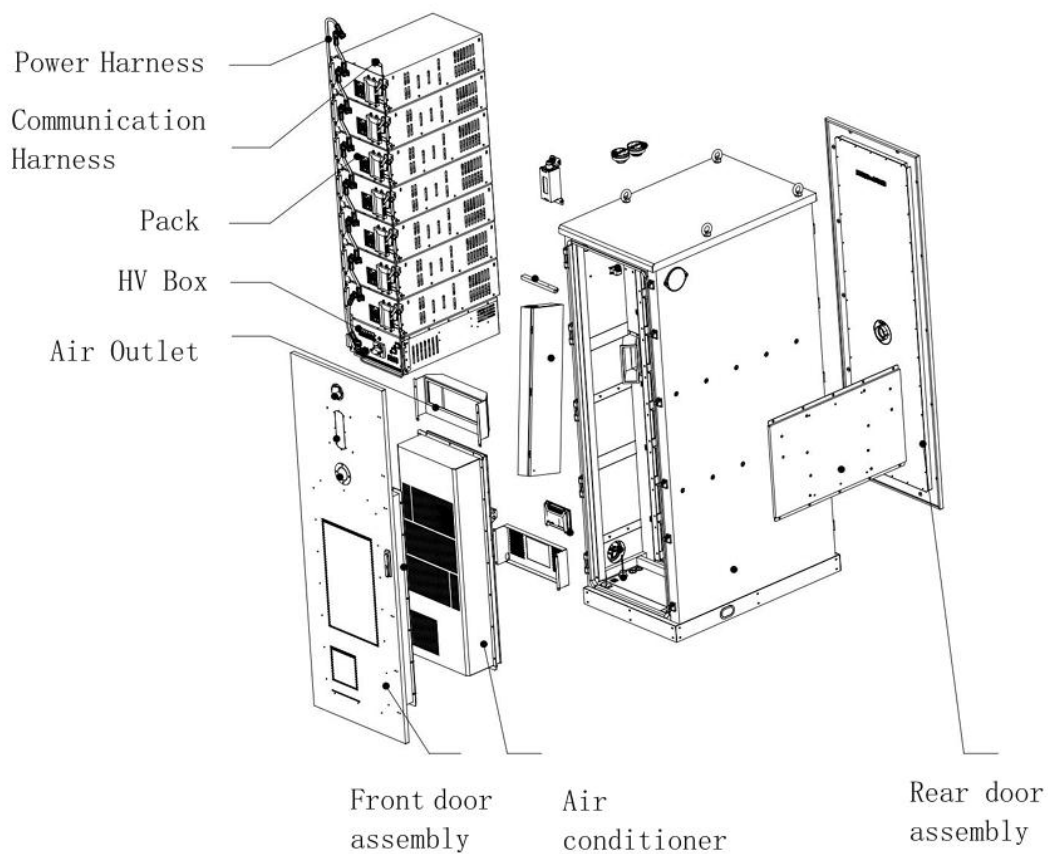

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

Rechargeable Li-ion Battery System		
Model type.....:	1) E-MATE 80-A, 2) E-MATE 96-A, 3) E-MATE 112-A, 4) E-MATE 128-A	
Rated capacity.....:	314Ah	
Nominal voltage..... :	1) 256V, 2) 307.2V, 3) 358.4V, 4) 409.6V	
Watt-hour.....:	1) 80.384kWh, 2) 96.4608kWh, 3) 112.5376kWh, 4) 128.6144kWh	
Recommended (rated) charge method.....:	Charge at a constant power of X until the voltage reaches maximum charge voltage or until the cell voltage drops to 3.6V, X are as follows: 1) 40.192kW, 2) 48.2304kW, 3) 56.2688kW, 4) 64.3072kW	
Maximum/Normal charge power :	1) 40.192kW, 2) 48.2304kW, 3) 56.2688kW, 4) 64.3072kW	
Maximum charge current.....:	179A	
Maximum charge voltage..... :	1) 288V, 2) 345.6V, 3) 403.2V, 4) 460.8V	
Charge temperature range.....:	From 0°C to 50°C	
Recommended (rated) discharge method.....:	Discharge at a constant power of X until the voltage reaches discharge cut-off voltage or the cell voltage reaches 2.8V, X are as follows: 1) 40.192kW, 2) 48.2304kW, 3) 56.2688kW, 4) 64.3072kW	
Maximum/Normal discharge power.....:	1) 40.192kW, 2) 48.2304kW, 3) 56.2688kW, 4) 64.3072kW	
Maximum discharge current.....:	179A	
Discharge cut-off voltage.....:	1) 224V, 2) 268.8V, 3) 313.6V, 4) 358.4V	
Discharge temperature range.....:	From -20°C to 50°C	
Auxiliary rated voltage.....:	AC 230V L/N/PE	
Auxiliary max. current.....:	AC 30A	
Auxiliary rated frequency.....:	50Hz	
Nominal weight.....:	1) 1264±50kg; 2) 1376±50kg; 3) 1488±50kg; 4) 1650±50kg	
Nominal dimension.....:	(780±5)mmx(1257±5)mmx(2373.5±5)mm (LxWxH)	
Storage temperature range.....:	-20°C ~ 50°C	
IP rating/ Enclosure index.....:	IP55	
Protective Class.....:	I	
Altitude.....:	4000m	
Rechargeable Li-ion Battery Module and Cell		
Model type.....:	E-MATE-16-QC	PC-0B1-72174L4-BE
Nominal capacity.....:	314Ah	314Ah
Nominal voltage..... :	51.2V	3.2V
Nominal charge current.....:	157A	502.4W
Maximum charge current.....:	179A	1004.8W
Nominal discharge current..... :	157A	502.4W
Maximum discharge current.....:	179A	1004.8W

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

Maximum charge voltage..... :	57.6V	3.8V
Charge Cut-off Voltage..... :	-	-
Cut-off Voltage..... :	44.8V	2.8V
Lower limit discharge voltage	43.2V	2.0V
Upper charge temperature..... :	50°C	60°C
Lower charge temperature..... :	0°C	0°C
Upper discharge temperature..... :	50°C	60°C
Lower discharge temperature..... :	-20°C	-30°C
Storage temperature range..... :	-20°C~50°C	-30°C~65°C
Recommend charging method declared by the manufacturer..... :	Charge at a constant power of 8.0384kW until the maximum cell voltage reaches 3.6 V or total voltage reaches 57.6V	Charging the cell with 157A constant current until to 3.8V, then constant voltage 3.8V until charging current reduces to 15.7A.
Recommend discharging method declared by the manufacturer..... :	Discharge at a constant power of 8.0384kW until the minimum cell voltage reaches 2.8 V or total voltage reaches 44.8V	Discharge the cell with 157A constant current until to 2.8V.
Nominal mass..... :	112±5kg	5.5±0.3kg
External dimensions..... :	(782.5±2)mmx(487±2)mmx(227±2) mm (LxWxH)	(71.72±2)mmx(174±2) mmx(207.11±2) mm (TxWxH)

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict

Test results

4	PROTECTION AGAINST HAZARDS		P
4.1	General		P
4.2	Fault and abnormal conditions	See Table 4.2 to 4.3	P
	Components in 4.2 also include insulation systems, ports, etc (IEC 62477-1:2012/AMD1:2016)		P
4.3	Short-circuit and overcurrent protection	See Table 4.2 to 4.3	P
4.3.1	General		P
4.3.2	Specification of prospective short-circuit current		P
4.3.2.1	General		P
	The interrupting capability of the overcurrent protective device shall be equal or greater than the prospective short circuit current of the mains supply.	Considered	P
	For pluggable equipment type A, either the PECS shall be designed so that the building installation provides short circuit backup protection, or additional short circuit backup protection shall be provided as part of the equipment.	No connected to AC mains directly, for external auxiliary power is considered as not exceeding 10kA	N/A
	For permanently connected equipment or pluggable equipment type B, it is permitted for short circuit backup protection to be in the building installation.	Considered	P
4.3.2.2	Specification of the rated conditional short-circuit current (I_{cc}) on input ports (IEC 62477-1:2012/AMD1:2016)	No connected to AC mains directly, for external auxiliary power is considered as not exceeding 10kA	N/A
	In case the PECS manufacturer selects the conditional short-circuit current (I_{cc}) rating according to 4.3.1, the following specified: (IEC 62477-1:2012/AMD1:2016)		N/A
	- conditional short-circuit current (I_{cc}), (IEC 62477-1:2012/AMD1:2016)		N/A
	- characteristics of the short-circuit protective device, and (IEC 62477-1:2012/AMD1:2016)		N/A
	- minimum required prospective short-circuit current ($I_{cp, mr}$) (IEC 62477-1:2012/AMD1:2016)		N/A
	If it is shown by analysis that the result of one test is representative of the worst case, less severe combinations need not be tested. (IEC 62477-1:2012/AMD1:2016)		N/A
4.3.2.3	Output short circuit current ability	Considered	P
	The output short circuit current ratings apply to a.c. and d.c. power output ports and to other ports for which overcurrent protection is necessary. For all output ports, short circuit evaluation to determine the minimum and maximum output short	DC P + and P - : Short current: 3174A. Duration: 28ms.	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	circuit current shall be performed according to 5.2.4.4 and the output short circuit current available from the PECS shall be specified as in 5.2.4.4 and 6.2. Internal electronic output short circuit protection is considered acceptable as an output short circuit protection device of the PECS, when compliance is shown by test in 5.2.4.4.		
4.3.2.4	Combined input and output ports	Considered	P
	For ports which are both input and output ports the applicable requirements of both 4.3.2.1 and 4.3.2.3 apply.	Fulfil requirements	P
4.3.3	Short-circuit coordination (backup protection)	Internal protection	N/A
	Protective devices provided or specified shall have adequate breaking capability to interrupt the maximum prospective short circuit current specified for the port to which they are connected. If internal protection of the PECS is not rated for the prospective short circuit current, the installation instructions shall specify an upstream protective device, rated for this prospective short circuit current of that port, which shall be used to provide backup protection. Analysis shall ensure the protection coordination between the external and internal protective device.		N/A
	Compliance shall be checked by inspection and by the tests of 5.2.4.4 and 5.2.4.5.		N/A
4.3.4	Protection by several devices	Considered.	P
	Where protective devices that require manual replacement or resetting are used in more than one pole of a supply to a given load, those devices shall be located together. It is permitted to combine two or more protective devices in one component. Compliance shall be checked by inspection.	Fulfil requirements	P
4.3.5	Input ports short time withstand current, I_{cw} (IEC 62477-1:2012/AMD1:2016)	No connected to AC mains directly, for external auxiliary power is considered as not exceeding 10kA	N/A
	In case the PECS manufacturer selects the short time withstand current (I_{cw}) rating according to 4.3.1, the following specified: (IEC 62477-1:2012/AMD1:2016)		N/A
	- rated short time withstand current (I_{cw}), (IEC 62477-1:2012/AMD1:2016)		N/A
	- associated duration, and (IEC 62477-1:2012/AMD1:2016)		N/A
	- rated peak withstand current (I_{pk}). (IEC 62477-1:2012/AMD1:2016)		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	If it is shown by analysis that the result of one test is representative of the worst case, less severe combinations need not be tested. (IEC 62477-1:2012/AMD1:2016)		N/A
4.4	Protection against electric shock		P
4.4.1	General	See below	P
4.4.2	Decisive voltage classification		P
4.4.2.1	General	Considered	P
4.4.2.2	Determination of decisive voltage class		P
4.4.2.2.1	General	See below	P
	For protection against the ventricular fibrillation body reaction, DVC can be selected from Table 2.	Accessible Com. Port circuit: DVC A; Power circuit and other circuits: DVC C.	P
4.4.2.2.2	Selection tables for contact area and skin humidity condition		P
	In order to protect against ventricular fibrillation, the appropriate conditions from Table 3 and Table 4 shall be selected.	Considered	P
4.4.2.2.3	Limits of the working voltage for the DVC	Considered	P
4.4.2.3	Requirements for protection against electric shock		P
4.4.3	Provision for basic protection		P
4.4.3.1	General	Considered	P
4.4.3.2	Protection by means of insulation of live parts	Considered	P
	Live parts shall be completely surrounded with insulation if their working voltage is greater than DVC As or if they do not have protective separation from adjacent circuits of DVC C.	Live parts protective separation from adjacent circuits of DVC C.	P
	Basic insulation may be provided by solid insulation or air clearance.		P
	The insulation shall be rated according to the impulse voltage, temporary overvoltage or working voltage (see 4.4.7.2.1), whichever gives the most severe requirement. It shall not be possible to remove the insulation without the use of a tool or key.	The insulation can't be removed without use of tools or key.	P
4.4.3.3	Protection by means of enclosures or barriers		P
	Live parts with voltage higher than DVC As shall be: - arranged in enclosures or located behind enclosures or barriers, which meet at least the requirements of the Protective Type IPXXB according to Clause 7 of IEC 60529:1989; - located at the top surfaces of enclosures or barriers which are accessible when the equipment is	Considered IP55	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	energized shall meet at least the requirements of the protective type IP3X with regard to vertical access only.		
	For moveable equipment with no defined top and bottom this requirement of protective Type IP3X applies to all sides.	Fixed equipment	N/A
	If the PECS is installed in a restricted access area, IPXXB instead of IP3X applies.		N/A
	Product committees using this document as reference document might consider less requirement for equipment having openings in the top of an enclosure with a height exceeding 1,8 m.	No opening in the top	N/A
	Compliance is shown by test of 5.2.2.2.		P
	It shall only be possible to open enclosures or remove barriers: • with the use of a tool or key; or • after de-energization of these live parts.	With a key or tool	P
	Where the enclosure is required to be opened and the PECS energized during installation or maintenance: a) accessible live parts of voltage higher than DVC As shall be protected by at least IPXXA; b) live parts of voltage higher than DVC As that are likely to be touched when making adjustments shall be protected by at least IPXXB; c) it shall be ensured that persons are aware that live parts with voltage higher than DVC As are accessible.	Symbol used for warning on marking plate for installer as normal discharge after disconnecting all internal battery input, DC power and other voltage sources. For repairing and internal maintenance, only by service personal who is familiar with product and fully understood all safety information.	P
4.4.3.4	Protection by means of limitation of touch current and charge	No such means used	N/A
	The limitation of touch current and discharge energy shall not exceed: - a value of 3,5 mA a.c. or 10 mA d.c. for the limitation of touch current; and - a value of 50 µC for the limitation of discharge energy.		N/A
4.4.3.5	Protection by means of limited voltages	No such means used	N/A
	The voltage between simultaneously accessible parts shall not be greater than DVC As as determined in 4.4.2.2.		N/A
4.4.4	Provision for fault protection		P
4.4.4.1	General		P
	Fault protection shall be provided by one or more of	Class I equipment, protective	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	the following measures: • Protective equipotential bonding in 4.4.4.2 in combinations with the PE conductor in 4.4.4.3; • Automatic disconnection of supply in 4.4.4.4; • Supplementary insulation in 4.4.4.5; • Simple separation between circuits in 4.4.4.6; • Electrically protective screening in 4.4.4.7. Fault protection shall be independent and additional to those for basic protection.	boning and PE conductor are provided	
4.4.4.2	Protective equipotential bonding		P
4.4.4.2.1	General		P
	Protective equipotential bonding shall be provided between accessible conductive parts of the equipment and the means of connection for the PC conductor, except: a) accessible conductive parts that are protected by one of the measures in 4.4.6.4; or b) when accessible conductive parts are separated from <i>live parts</i> using <i>double</i> or <i>reinforced insulation</i>.	Considered	P
	Electrical contact to the means of connection of the PE conductor shall be achieved by one or more of the following means: • through direct metallic contact; • through other accessible conductive parts or other metallic components which are not removed when the PECS is used as intended; • through a dedicated protective equipotential bonding conductor.	Through direct metallic contact	P
4.4.4.2.2	Rating of protective equipotential bonding		P
	Protective equipotential bonding shall either be: a) sized in accordance with the requirements for the PE conductor in 4.4.4.3 and the means of connection for the PE conductor in 4.4.4.3.2 to ensure no voltage drop exceeding the values from 4.4.2.2.3 during a fault; or b) sized • to withstand the highest stresses that can occur to the PECS item(s) concerned when they are subjected to a fault connecting to accessible conductive parts; and • to remain effective for as long as a fault to the accessible conductive parts persists or until an upstream protective device removes power from the part; and • to ensure no voltage drop exceeding the values	Considered	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	from 4.4.2.2.3 during normal operation and during a fault. Compliance shall be checked with the type tests in 5.2.3.11		
4.4.4.3	PE conductor		P
4.4.4.3.1	General		P
	A PE conductor shall be connected at all times when power is supplied to the PECS, unless the PECS complies with the requirements of protective class II (see 4.4.6.3) or protective class III. Unless local wiring regulations state otherwise, the PE conductor cross-sectional area shall be determined from Table 7 or by calculation according to 543.1 of IEC 60364-5-54:2011.	Considered	P
	If the PE conductor is routed through a plug and socket, or similar means of disconnection, it shall not be possible to disconnect it unless power is simultaneously removed from the part to be protected.	Not this means	N/A
	The cross-sectional area of every PE conductor that does not form part of the supply cable or cable enclosure shall, in any case, be not less than: • 2,5 mm ² if mechanical protection is provided; or • 4 mm ² if mechanical protection is not provided.	Larger than 4 mm ² provided in the user manual	P
	Provisions within cord-connected equipment shall be made so that the PE conductor in the cord shall, in the case of failure of the strain-relief mechanism, be the last conductor to be interrupted. For special system topologies, the PECS designer shall verify the PE conductor cross-section required.	PE conductor is fixed separately through screw	N/A
4.4.4.3.2	Means of connection for the PE conductor		P
	PECS shall have a means of connection for the PE conductor, located near the terminals for the respective live conductors. The means of connection shall be corrosion-resistant and shall be suitable for the connection of conductors according to Table 7 and of cables in accordance with the wiring rules applicable at the installation. The means of connection for the PE conductor shall not be used as a part of the mechanical assembly of the equipment or for other connections. Connection and bonding points shall be designed so that their current-carrying capacity is not impaired by mechanical, chemical, or electrochemical influences. Where enclosures and/or conductors of aluminium or aluminium alloys are used, particular attention should be given to the problems of electrolytic corrosion. Compliance shall be checked by inspection.	Considered	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.4.4.3.3	Touch current in case of failure of PE conductor		P
	For all other PECS, one or more of the following measures shall be applied, unless the touch current can be shown to be less than the limits specified in 4.4.3.4: a) Use of a fixed connection and - a cross-section of the PE conductor of at least 10 mm² Cu or 16 mm² Al; or - automatic disconnection of the supply in case of discontinuity of the PE conductor; or - provision of an additional terminal for a second PE conductor of the same cross-sectional area as the original PE conductor; or b) Use of a pluggable type B connection with a minimum PE conductor cross-section of 2,5 mm² as part of a multi-conductor power cable. Adequate strain relief shall be provided.	a) measure used.	P
	Compliance is checked by inspection and by test of 5.2.3.7.	Considered	P
4.4.4.4	Automatic disconnection of supply	No automatic disconnection device in this system	N/A
	For automatic disconnection of supply: - a protective equipotential bonding system shall be provided; and - a protective device operated by the fault current shall disconnect one or more of the line conductors supplying the equipment, system or installation, in case of a failure of basic insulation. The protective device shall interrupt the fault current within a time as specified in Figure 1, Figure 2 or Figure 3 in 4.4.2.2.3.		N/A
4.4.4.5	Supplementary insulation	Considered	P
4.4.4.6	Simple separation between circuits		P
	If any component is connected between the separated circuits, that component shall withstand the electric stresses specified for the insulation which it bridges. If any component is connected between a circuit and a circuit connected to earth, its impedance shall limit the current flow through the component to the steady-state touch current values indicated in 4.4.3.4.		P
4.4.4.7	Electrically protective screening		P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Electrically protective screening interposed between hazardous live parts of a PECS, shall consist of a conductive screen connected to the protective equipotential bonding of the PECS whereby the screen is separated from live parts by at least simple separation. The protective screen and the connection to the protective equipotential bonding system of the PECS and that interconnection shall comply with the requirements of 4.4.4.2.	Considered	P
4.4.5	Enhanced protection		P
4.4.5.1	General		P
	Enhanced protection shall provide both basic and fault protection and can be achieved by means of: • Reinforced insulation in 4.4.5.2; • Protective separation between circuits in 4.4.5.3; • Protection by means of in 4.4.5.4.		P
4.4.5.2	Reinforced insulation		P
	Reinforced insulation shall be so designed as to be able to withstand electric, thermal, mechanical and environmental stresses with the same reliability of protection as provided by double insulation. (basic insulation and supplementary insulation, see 4.4.3.2 and 4.4.4.5)	Considered	P
4.4.5.3	Protective separation between circuits		P
	Protective separation between a circuit and other circuits shall be achieved by one of the following means: • double insulation (basic insulation and supplementary insulation in 4.4.3.2 and 4.4.4.5); • reinforced insulation in 4.4.5.2; • electrically protective screening in 4.4.4.7; • a combination of these provisions.	Considered	P
	If conductors of the separated circuit are contained together with conductors of other circuits in a multi-conductor cable or in another grouping of conductors, they shall be insulated, individually or collectively, for the highest voltage present, so that double insulation is achieved. If any component is connected between the separated circuits, that component shall comply with the requirements for protective impedance devices (see 4.4.5.4)	Considered	P
4.4.5.4	Protection by means of protective impedance		P
	Protective impedance shall be arranged so that under both normal and single fault conditions the current and discharge energy available shall be		P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	limited according to 4.4.3.4.		
	The protective impedances shall be designed and tested to withstand the impulse voltages and temporary overvoltages for the circuits to which they are connected. See 5.2.3.2 and 5.2.3.4 for tests.		P
	Compliance with the requirement for the limitation of touch current is checked by test of 5.2.3.6.		P
	Compliance with the requirement for the discharge energy shall be checked by performing calculations and/or measurements to determine the voltage and capacitance. NOTE A protective impedance designed according to this subclause is not considered to be a galvanic connection.		P
4.4.6	Protective measures		P
4.4.6.1	General		P
4.4.6.2	Protective measures for protective class I equipment	Considered	P
	Protective class I equipment shall meet the requirements for: • basic protection in 4.4.3; and • fault protection in 4.4.4.2 and 4.4.4.3 with respect to equipotential bonding and PE conductor.	Considered	P
4.4.6.3	Protective measures for protective class II equipment	Class I equipment	N/A
	Protective class II equipment shall meet the requirements for enhanced protection according to 4.4.5 and the enclosure shall meet the requirement for basic protection in 4.4.3 with respect to accessibility to hazardous live parts. Protective class II equipment shall not have means of connection for the PE conductor. This does not apply if a PE conductor is passed through the equipment to equipment series-connected beyond it. In the latter case the PE conductor and its means for connection shall be separated from: • accessible surface of the equipment; and • circuits which employ protective separation with at least simple separation according to the requirement in 4.4.4.6. The simple separation shall be designed according to the rated voltage of the series-connected equipment. Equipment of protective class II may have provision for the connection of an earthing conductor for functional reasons or for the damping of	Class I equipment	N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	overvoltages. In this case, the functional earthing conductor shall be separated from: • accessible surface of the equipment; and • circuits which employ protective separation according to 4.4.5.3 with at least protective separation according to the requirement in 4.4.5.3. Equipment of protective class II shall be marked according to 6.3.7.3.3. Compliance is checked by inspection.		
4.4.6.4	Protective measures for protective class III equipment		N/A
4.4.6.4.1	General	Class I equipment	N/A
	Protective measures shall be achieved by protective separation by one of the following means: • basic insulation and supplementary insulation (double insulation) according to 4.4.3.2 and 4.4.4.5; • reinforced insulation according to 4.4.5.2; • electrically protective screening and simple separation according to 4.4.4.7; or • a combination of these provisions; used in combination with one of the following means: • protective impedance according to 4.4.5.4 comprising limitation of discharge energy and of current; or • limitation of voltage according to 4.4.3.5.	Class I equipment	N/A
	The protective separation shall be fully and effectively maintained under all conditions of intended use of the PECS.	Class I equipment	N/A
4.4.6.4.2	Connection to PELV and SELV circuits	Connection of an external PELV or SELV circuit with a higher voltage than DVC As is not permitted	N/A
	If a port is intended for connection of an external PELV or SELV circuit with a higher voltage than DVC As: • measures to limit the voltage to that of DVC As shall be taken (see Annex A); or • basic protection shall be provided. For connectors containing pins with very small contact area (< 1 mm²), the next higher voltage level for DVC As, of Table 5, is permitted. Example: if DVC A1 is DVC As, then DVC A2 is permitted at pins of signal connectors. The connection of external PELV or SELV circuits to an internal circuit is permitted with the following		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	consideration: • without measures: only if the DVC of the PELV and SELV voltage are lower than or equal to the DVC selected from Table 5 for the internal circuit under consideration; and • with measures: if the DVC of the PELV and SELV voltage are higher than the DVC selected from Table 5 for the internal circuit under consideration. The possibility of an addition of the voltages of the circuits under consideration to a higher level under fault conditions shall be considered. For marking, see 6.3.7.1. Consideration needs to be given to factors such as whether the circuits involved are earthed or not, what the voltages involved are, whether or not direct contact with live parts is possible, single faults in either equipment or the interconnections, etc.		
4.4.7	Insulation		P
4.4.7.1	General		P
4.4.7.1.1	Influencing factors		P
	This subclause gives minimum requirements for insulation, based on the principles of IEC 60664.		P
	Insulation shall be selected after consideration of the following influences: - pollution degree; - overvoltage category; - supply system earthing; - impulse withstand voltage, temporary overvoltage and working voltage; - location of insulation; - type of insulation.	Considered.	P
	Verification of insulation shall be made according to 5.2.2.1, 5.2.3.2, 5.2.3.4 and 5.2.3.5.	See table 4.4.7.4 to 4.4.7.5	P
4.4.7.1.2	Pollution degree		P
	Insulation, especially when provided by clearances and creepage distances, is affected by pollution which occurs during the expected lifetime of the PECS. The micro-environmental conditions for insulation shall be applied according to Table 8.	Pollution degree 2 internal Pollution degree 3 outside	P
	The pollution degree shall be determined according to the environmental condition for which the product is specified. See Table 18 for selection of pollution degree according to environmental classification of the installation.	Considered.	P
	The insulation may be determined according to pollution degree 2 if one of the following applies: a) instructions are provided with the PECS indicating	a) apply pollution degree 2 considered	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	that it shall be installed in a pollution degree 2 environment; or b) the specific installation application of the PECS is known to be a pollution degree 2 environment; or c) the PECS enclosure or coatings applied within the PECS according to 4.4.7.8.4.2 or 4.4.7.8.6 provide adequate protection against what is expected in pollution degree 3 and 4 (conductive pollution and condensation).		
	The PECS manufacturer shall state in the documentation the pollution degree for which the PECS has been designed.	The manufacturer state in the documentation the pollution degree for which the PECS has been designed.	P
	If operation in a pollution degree 4 environment is required, protection against conductive pollution shall be provided by means of a suitable enclosure.	No this required	N/A
4.4.7.1.3	Overvoltage category (OVC)		P
	The measures for reduction of the impulse voltage shall ensure that the temporary overvoltages that could occur are sufficiently limited so that their peak value does not exceed the relevant rated impulse voltage of Table 9 and shall meet the requirement of 4.4.7.2.2, 4.4.7.2.3 and 4.4.7.3 as applicable.	Considered.	P
	Four categories are considered. • Equipment of overvoltage category IV (OVC IV) is for use at the origin of the installation. • Equipment of overvoltage category III (OVC III) is equipment in fixed installations and for cases where the reliability and the availability of the equipment are subject to special requirements. • Equipment of overvoltage category II (OVC II) is energy-consuming equipment to be supplied from the fixed installation. • Equipment of overvoltage category I (OVC I) is equipment for connection to circuits in which measures are taken to limit transient overvoltages to an appropriately low level.	Battery side: Overvoltage Category II Auxiliary power side: Overvoltage Category III	P
4.4.7.1.4	Supply earthing systems		P
	The following three basic types of system earthing are described in IEC 60364-1. • TN system: has one point directly earthed, the accessible conductive parts of the installation being connected to that point by protective conductors. Three types of TN system, TN-C, TN-S and TN-C-S, are defined according to the arrangement of the neutral and protective conductors. • TT system: has one point directly earthed, the accessible conductive parts of the installation being connected to earth electrodes electrically	Auxiliary power supply considered as TN For battery system should be considered in installation connected via PCS to grid	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	independent of the earth electrodes of the power system. • IT system: has all live parts isolated from earth or one point connected to earth through an impedance, the accessible conductive parts of the installation being earthed independently or collectively to the system earthing.		
4.4.7.1.5	Determination of impulse withstand voltage and temporary overvoltage		P
	Table 9 uses the system voltage (see 4.4.7.1.6) and overvoltage category of the circuit under consideration to determine the impulse withstand voltage. The system voltage is also used to determine the temporary overvoltage. A PECS having more than one input or output shall be evaluated according to the input or output which gives the most severe requirements.	Considered.	P
4.4.7.1.6	Determination of the system voltage		P
4.4.7.1.6.1	For mains supply	Only for auxiliary power	P
4.4.7.1.6.2	For non-main supply	OVC II, battery input Max. DC 467.2V considered	P
	For PSCS supplied by non-mains a.c. or d.c., the system voltage is the r.m.s. value of the supply voltage between phases.		P
4.4.7.1.7	Components bridging insulation		P
	Components bridging insulation shall comply with the requirements of the level of insulation (e.g. basic, reinforced, double) they are bridging.	Certified components used	P
4.4.7.2	Insulation to the surroundings		P
4.4.7.2.1	General		P
4.4.7.2.2	Circuits connected to mains supply		P
	Insulation between the surroundings and circuits which are connected directly to the mains supply shall be designed according to the impulse withstand voltage, temporary overvoltage, or working voltage, whichever gives the most severe requirement.	Only for auxiliary power	P
4.4.7.2.3	Circuits connected to Non-mains supply		P
	Insulation between the surroundings and circuits supplied from a non-mains supply shall be designed according to: • the impulse withstand voltage determined from Table 9 using the system voltage; • the working voltage; • the temporary overvoltage if known to exist due to the nature of the supply;	Considered.	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	whichever gives the more severe requirement.		
	Temporary overvoltage on a non-mains supply shall be determined as follows: • Without detailed knowledge of the temporary overvoltage, it shall be according to Table 9. • If the temporary overvoltage is known this value shall be used.	According to Table 9	P
	By the determination of temporary overvoltages on non-mains supply, following situations should be considered: • loss of the neutral in a non-mains low-voltage system; • accidental earthing of a non-mains low voltage IT system; and • short circuit in the non-mains low voltage installation.		P
4.4.7.2.4	Insulation between circuits		P
	Insulation between two circuits shall be designed according to the circuit having the more severe requirement. For the design of simple and protective separation between circuits the insulation shall be designed according to: • the circuit having the more severe requirement; or • the working voltage between the circuits; whichever gives the most severe requirement.	Considered. Basic insulation between the main circuit and PE. Reinforced insulation between the main circuit and communication port.	P
4.4.7.3	Functional insulation		P
	If the failure of functional insulation does not produce a hazard (electrical, thermal, fire), no specific requirements apply for the dimensioning of functional insulation. In other cases the following requirements apply. Testing is not required, except where the circuit analysis required by 4.2 shows that failure of the insulation could result in a hazard. For parts or circuits that are significantly affected by external transients, functional insulation shall be designed according to the impulse withstand voltage of overvoltage category II, except that overvoltage category III shall be used when the PECS is connected at the origin of the installation. Where measures are provided that reduce transient overvoltages within the circuit from category III to values of category II, or values of category II to values of category I, functional insulation may be designed for the reduced values. Where the circuit characteristics can be shown by testing (see 5.2.3.2) to reduce impulse voltages,	Considered.	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	functional insulation may be designed for the highest impulse voltage occurring in the circuit during the tests. For parts or circuits that are not significantly affected by external transients, functional insulation shall be designed according to the working voltage across the insulation.		
4.4.7.4	Clearance distance		P
4.4.7.4.1	Determination	See Table 4.4.7.4	P
	Clearances for functional, basic and supplementary insulation shall be dimensioned according to Table 10 (see Annex D for examples of the evaluation of clearance distances). Interpolation is permitted, when clearance is determined from temporary overvoltage or working voltage. Clearances for reinforced insulation shall be dimensioned to withstand an impulse voltage one step higher than the impulse withstand voltage, or 1,6 times the peak temporary overvoltage or peak working voltage, required for basic insulation. Clearance distances for use in altitudes between 2 000 m and 20 000 m shall be calculated using a correction factor according to Table A.2 of IEC 60664-1:2007, which is reproduced as Table E.1. A correction factor selected from Table F.2 is also used for determination of clearance distances for approximately homogenous fields when frequencies are greater than 30 kHz, as given in Annex F.	Considered.	P
	Compliance shall be checked by visual inspection (see 5.2.2.1) or by performing the impulse voltage test of 5.2.3.2 and the a.c. or d.c. voltage test of 5.2.3.4.	Fulfil requirements	P
4.4.7.4.2	Electric field homogeneity	Non-homogeneity electric field considered	N/A
	The dimensions in Table 10 correspond to the requirements of an inhomogeneous electric field distribution across the clearance, which are the conditions normally experienced in practice. If a homogeneous electric field distribution is known to exist, the clearance distance for basic or supplementary insulation may be reduced to not less than that required by Table F.2 (Case B) of IEC 60664-1:2007. In this case, however, the impulse voltage test of 5.2.3.2 shall be performed across the considered clearance. If the withstand against steady state voltages, recurring peak or temporary overvoltages according to Table 10 is decisive for the dimensioning of clearance and if these clearances are smaller than the values of Table 10 then an a.c. or d.c. voltage		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	test according to 5.2.3.4 is required. Clearance distances for reinforced insulation shall not be reduced for homogeneous fields.		
4.4.7.4.3	Clearance to conductive enclosures	Considered	P
	The clearance between any non-insulated live part and the walls of a metal enclosure shall be in accordance with 4.4.7.4.1 during and following the deflection tests of 5.2.2.4.2.	See table 4.4.7.4 to 4.4.7.5	P
	Compliance is checked by inspection and by test of 5.2.2.4.2.	See table 4.4.7.4 to 4.4.7.5	P
	If the design clearance distance is at least 12,7 mm and the clearance distance required by 4.4.7.4.1 does not exceed 8 mm, the deflection tests may be omitted.		N/A
4.4.7.5	Creepage distance		P
4.4.7.5.1	Insulating material groups	Considered	P
	Creepage distance requirements for PWBs exposed to pollution degree 3 environmental conditions shall be determined based on Table 11 pollution degree 3 under "Other insulators".	PD2 considered for PWB area	N/A
	For inorganic insulating materials, for example glass or ceramic, which do not track, the creepage distance may equal the associated clearance distance, as determined from Table 10.	See Table 4.4.7.5	P
4.4.7.5.2	Determination	See Table 4.4.7.5	P
	Creepage distances for functional, basic and supplementary insulation shall be dimensioned according to Table 11. Interpolation is permitted. Creepage distances for reinforced insulation shall be twice the distances required for basic insulation.	See Table 4.4.7.5	P
	When the creepage distance requirement determined from Table 11 is less than the clearance distance required by 4.4.7.4.1 or the clearance distance determined by impulse testing (see 5.2.3.2), then the creepage distance shall be increased to the clearance distance.	See Table 4.4.7.5	P
	Compliance of creepage distances shall be checked by measurement or inspection (see 5.2.2.1) (see Annex D for examples of the evaluation of creepage distances).	See Table 4.4.7.5	P
4.4.7.6	Coating	No such coating used.	N/A
	A coating may be used to provide insulation, to protect a surface against pollution, and to allow a reduction in creepage and clearance distances (see 4.4.7.8.4.2 and 4.4.7.8.6)		N/A
4.4.7.7	PWB spacings for functional insulation	Considered	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Spacings for functional insulation shall comply with the requirement of 4.4.7.4 and 4.4.7.5.	See Table 4.4.7.5	P
	Decreased spacings on PWB are permitted when all the following are satisfied: - the PWB has flammability rating of V-0 (see IEC 60695-11-10); - the PWB base material has a minimum CTI of 100; - the equipment complies with the PWB short circuit test (see 5.2.4.7). Decreased spacings for components assembled on PWB are permitted when used in: - pollution degree 1 or 2 environment; and - not more than overvoltage category I. In this case the manufacture specification may be used. Compliance is checked by inspection and by test of 5.2.4.7 if applicable.		N/A
4.4.7.8	Solid insulation		N/A
4.4.7.8.1	General	See Table 4.4.7.5	P
	Materials selected for solid insulation shall be able to withstand the stresses occurring. These include mechanical, electrical, thermal, climatic and chemical stresses which are to be expected in normal use. Insulation materials shall also be resistant to ageing during the expected lifetime of the PECS. Tests shall be performed on components and sub-assemblies using solid insulation, in order to ensure that the insulation performance has not been compromised by the design or manufacturing process.		P
4.4.7.8.2	Material requirements	Considered	P
	The insulating material shall have a CTI of 100 or greater. The insulating material shall be suitable for the maximum temperature it attains as determined by the temperature rise test of 5.2.3.10. Consideration shall be given as to whether or not the insulating material additionally provides mechanical strength and whether or not the part can be subject to impact during use.	Relative data as indicated in certificate for insulating material, detail see CDF	P
	The insulating material in contact with live parts higher than DVC As shall comply with: - the glow-wire test described in 5.2.5.3 at a test temperature of 850 °C; or - the glow-wire test described in 5.2.5.3, at a lower		P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	test temperature, but not less than 550 °C, depending on the classification of the use of the PECS, according to Table A.1 of IEC 60695-2-11:2011; or • the alternative hot wire ignition test of 5.2.5.4.		
	Thermoplastic insulating materials used in contact with live parts higher than DVC As or used as part of the enclosure shall comply with the ball pressure test as abnormal heat test according to IEC 60695-10-2.		P
	Where an insulating material is used in a PECS that incorporates switching contacts, and is within 12,7 mm of the contacts, it shall comply with the high current arcing ignition test of 5.2.5.2.	Not this material	N/A
	In case the manufacturer of the insulating material provides data to demonstrate compliance with the above requirements no further testing is required. No further evaluation is required when generic materials are used according to Table 12.	The manufacturer provides data to demonstrate compliance with the above requirements	P
	Compliance is checked by inspection and by test of 5.2.3.10 and 5.2.5.3 or 5.2.5.2.		P
4.4.7.8.3	Thin sheet or tape material		P
4.4.7.8.3.1	General	See Table 4.4.7.8.3.2	P
	4.4.7.8.3 applies to the use of thin sheet or tape materials in assemblies such as wound components and bus-bars. Insulation consisting of thin (less than 0,75 mm) sheet or tape materials is permitted, provided that it is protected from damage and is not subject to mechanical stress under normal use. Where more than one layer of insulation is used, there is no requirement for all layers to be of the same material. NOTE 1 One layer of insulation tape wound with more than 50 % overlap is considered to constitute two layers. NOTE 2 Basic, supplementary and double insulation can be applied as a pre-assembled system of thin materials.		P
4.4.7.8.3.2	Material thickness $\geq 0,2$ mm		P
	Basic or supplementary insulation shall consist of at least one layer of material, which will meet the requirements of 4.4.7.8.1 and 4.4.7.10.1.		P
	Double insulation shall consist of at least two layers of material, each of which will meet the requirements of 4.4.7.8.1, 4.4.7.10.1, and the partial discharge requirements of 4.4.7.10.2, and both layers together will meet the impulse and a.c. or d.c. voltage		P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	requirements of 4.4.7.10.2.		
	Reinforced insulation shall consist of a single layer of material, which will meet the requirements of 4.4.7.8.1 and 4.4.7.10.2.		P
	NOTE The requirements of this subclause indicate that double insulation can be at least 0,4 mm thick, while reinforced insulation is permitted to be 0,2 mm thick.		P
4.4.7.8.3.3	Material thickness less than 0,2 mm	No such sheet or tape materials	N/A
	Basic or supplementary insulation shall consist of at least two layers of material, which will meet the requirements of 4.4.7.8.1 and 4.4.7.10.1.		N/A
	Double insulation shall consist of at least three layers of material. Each layer shall meet the requirements of 4.4.7.8.1 and 4.4.7.10.1, and any two layers together shall meet the requirements of 4.4.7.10.2.		N/A
	Reinforced insulation consisting of a single layer of material is not permitted.		N/A
4.4.7.8.3.4	Compliance		N/A
	Compliance shall be checked by the tests described in 5.2.3.1 to 5.2.3.5. When a component or sub-assembly makes use of thin sheet insulating materials, it is permitted to perform the tests on the component rather than on the material.	No use of thin sheet insulating materials	N/A
4.4.7.8.4	Printed wiring boards (PWBs)		P
4.4.7.8.4.1	General		P
	Insulation between conductor layers in double-sided single-layer PWBs, multi-layer PWBs and metal core PWBs, shall meet the requirements of 4.4.7.8.1. Basic, supplementary, double and reinforced insulation shall meet the appropriate requirements of 4.4.7.10.1 or 4.4.7.10.2. Functional insulation in PWBs shall meet the requirements of 4.4.7.7. For the inner layers of multi-layer PWBs, the insulation between adjacent tracks on the same layer shall be treated as either: • a creepage distance for pollution degree 1 and a clearance as in air (see Example D.14); or • solid insulation, in which case it shall meet the requirements of 4.4.7.8.1 and 4.4.7.10.		P
4.4.7.8.4.2	Use of coating materials	No coating materials used	N/A
	A coating material used to provide functional, basic, supplementary and reinforced insulation shall meet the requirement as specified below.	No coating materials used	N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Type 1 protection (as defined in IEC 60664-3) improves the microenvironment of the parts under protection. The clearance and creepage distance of Table 10 and Table 11 for pollution degree 1 apply under the protection. Between two conductive parts, it is a requirement that one or both conductive parts, together with all the spacing between them, are covered by the protection.	No coating materials used	N/A
	Type 2 protection is considered to be similar to solid insulation. Under the protection, the requirements for solid insulation specified in 4.4.7.8 are applicable, including the coating material itself, and spacings shall not be less than those specified in Table 1 of IEC 60664-3:2003. The requirements for clearance and creepage in Table 10 and Table 11 do not apply. Between two conductive parts, it is a requirement that both conductive parts, together with the spacing between them, are covered by the protection so that no air gap exists between the protective material, the conductive parts and the printed boards.	No coating materials used	N/A
	The coating material used to provide Type 1 and Type 2 protection shall be designed to withstand the stresses anticipated to occur during the expected lifetime of the PECS. A type test on representative PWBs shall be conducted according to Clause 5 of IEC 60664-3:2003. For the cold test (5.7.1 of IEC 60664-3:2003), a temperature of -25 °C shall be used, and for the rapid change of temperature test (5.7.3 of IEC 60664-3:2003): -25 °C to +125 °C. No routine test is required.	No coating materials used	N/A
4.4.7.8.5	Wound components		P
	Varnish or enamel insulation of wires shall not be used for basic, supplementary, double or reinforced insulation. Wound components shall meet the requirements of 4.4.7.8.1 and 4.4.7.10. The component itself shall pass the requirements given in 4.4.7.8.1 and 4.4.7.10.2. If the component has reinforced or double insulation, the a.c. or d.c. voltage test of 5.2.3.4 shall be performed as a routine test.		P
4.4.7.8.6	Potting materials	No potting materials used	N/A
	A potting material may be used to provide solid insulation or to act as a coating to protect against pollution.		N/A
	If used as solid insulation, it shall comply with the requirements of 4.4.7.8.1 and 4.4.7.10.		N/A
	If used to protect against pollution, the requirements for Type 1 protection in 4.4.7.8.4.2 apply.		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.4.7.9	Connection of parts of solid insulation (Cemented joints)	No cemented joints used	N/A
	The creepage and clearance path in the presence of a cemented joint between two insulating parts, are determined as follows. • Type 1 or type 2 protection as described in 4.4.7.8.4.2 apply. • A cemented joint that is not evaluated as providing protection of type 1 or type 2, is neither considered solid insulation nor to reduce pollution degree. The clearance and creepage distances of Table 10 and Table 11 apply for the pollution degree of the environment around the joint. See 5.2.5.7 for test.		N/A
4.4.7.10	Requirements for electrical withstand capability		P
4.4.7.10.1	Basic or supplementary insulation	See Table 4.4.7.10	P
	Test with impulse withstand voltage according to 5.2.3.1	See Table 4.4.7.10	P
	Test with a.c. or d.c. voltage according to 5.2.3.4	See Table 4.4.7.10	P
4.4.7.10.2	Double and reinforced insulation	See Table 4.4.7.10	P
	Double or reinforced insulation shall be tested as follows: • Test with impulse withstand voltage according to 5.2.3.2; and • Test with a.c. or d.c. voltage according to 5.2.3.4.	See Table 4.4.7.10	P
	For solid insulation, the partial discharge test according to 5.2.3.5 shall be performed in addition to the above tests, if the recurring peak working voltage across the insulation is greater than 750 V and the voltage stress on the insulation is greater than 1 kV/mm. The partial discharge test shall be performed as a type test on all components, sub-assemblies and PWB. In addition, a sample test shall be performed if the insulation consists of a single layer of material.		N/A
	Double insulation shall be designed so that failure of the basic insulation or of the supplementary insulation will not result in reduction of the insulation capability of the remaining part of the insulation.	Fulfil requirements	P
4.4.7.11	Insulation requirements above 30 kHz	No insulation used above 30kHz	N/A
4.4.8	Compatibility with residual current-operated protective devices	No RCD used inside	N/A
	To ensure the intended work of an RCD provided by the installation PECS shall satisfy one of the following conditions. a) A Pluggable Type A single-phase PECS, shall be designed so that, under normal and fault conditions		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	any resulting d.c. component of the current in the PE conductor does not exceed the d.c. current withstand requirements in IEC 60755 for RCD of type A. b) For PECS that are Pluggable Type B or intended for permanent connection, d.c. current in the PE conductor is not limited if the information and marking requirements of 6.3.7.4 are complied with.		
	Compliance with RCD provided by the installation shall be checked by simulation or calculation of current in the PE conductor under normal and single fault conditions according to the guideline provided in Annex H.		N/A
4.4.9	Capacitor discharge		N/A
	For protection against shock hazard, capacitors within a PECS shall be discharged to a voltage less than DVC As, or to a residual charge less than 50 μ C, after the removal of power from the PECS: • For pluggable PECS type A and B the discharge time shall not exceed 1 s or the hazardous live parts shall be protected against direct contact by at least IPXXB (see 4.4.3.3). • For permanently connected PECS the discharge time shall not exceed 5 s. For pluggable PECS type A and B and permanently connected PECS, which do not meet the above requirements, access shall only be possible by means of a tool or key and the information and marking requirements of 6.5.2 apply. Compliance is checked by test of 5.2.3.8.		N/A
4.5	Protection against electrical energy hazards		P
4.5.1	Operator Access Areas		P
4.5.1.1	General		P
	Equipment shall be so designed that there is no risk of electrical energy hazard in operator access areas from accessible circuits by fulfilling requirement of 4.2. A risk of injury due to an electrical energy hazard exists if it is likely that two or more bare parts (one of which may be earthed) between which a hazardous energy level exists, will be bridged by a metallic object. The likelihood of bridging the parts under consideration is determined by means of the test finger of Figure 1 of IEC 60529:1989, in a straight position. If it is possible to bridge the parts with this test finger, a hazardous energy level shall not exist. Barriers, guards, and similar means preventing unintentional contact may be provided as an alternative to limiting the energy.	Equipment is designed that there is no risk of electrical energy hazard in operator access areas from accessible circuits by fulfilling requirement of 4.2.	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Compliance is checked by inspection or test of 5.2.2.2.	Fulfil requirements	P
4.5.1.2	Determination of hazardous energy level		P
	A hazardous electrical energy level is considered to exist if: • the voltage is 2 V or more; and • power available exceeds 240 VA after 60 s; or • the energy exceeds 20 J. Compliance shall be checked with the test in 5.2.3.9 or by calculation.		P
4.5.2	Service Access Areas		N/A
	Capacitors within a PECS shall be discharged to an energy level less than 20 J, as in 4.5.1.2, within 5 s after the removal of power from the PECS. If this requirement is not achievable for functional or other reasons, the information and marking requirements of 6.5.2 apply.		N/A
	If the capacitor discharge time cannot be accurately calculated, the discharge time shall be measured.		N/A
4.6	Protection against fire and thermal hazards		P
4.6.1	Circuits representing a fire hazard		P
	The following types of circuits are considered a fire hazard: - circuits directly connected to the mains - circuits that are not directly connected to the mains but exceed the limits for limited power sources in 4.6.5 - components having unenclosed arcing parts		P
4.6.2	Components representing a fire hazard		P
4.6.2.1	General	Considered.	P
	Compliance with 4.6.2 and 4.6.3 shall be confirmed by inspection of component and material data sheets and, where necessary, by test.	Fulfil requirements	P
4.6.2.2	Components within a circuit representing a fire hazard		P
	Inside fire enclosures, materials for components and other parts and all materials in contact with such parts shall comply with flammability class V-2 as classified in IEC 60695-11-10 or flammability class HF-2 as classified in ISO 9772 or better.	Fire resistant material used, please refer to CDF for details	P
	The above requirement does not apply to any of the following: • electrical components which do not present a fire hazard under abnormal operating conditions when		P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	tested according to 5.2.4.6; • materials and components within an enclosure of 0,06 m³ or less, consisting totally of metal and having no ventilation openings, or within a sealed unit containing an inert gas; • electronic components, such as integrated circuit packages, opto-coupler packages, capacitors and other small parts that are mounted on material of flammability class V-1 or better; • wiring, cables and connectors insulated with PVC, TFE, PTFE, FEP, neoprene or polyimide; • the following parts, provided that they are separated from electrical parts (other than insulated wires and cables) which under fault conditions are likely to produce a temperature that could cause ignition, by at least 13 mm of air or by a solid barrier of material of flammability class V-1 or better: – other small parts which would contribute negligible fuel to a fire, including, labels, mounting feet, key caps, knobs and the like; – tubing for air or any fluid systems, containers for powders or liquids and foamed plastic parts, provided that they are of flammability class HB.		
4.6.2.3	Components within a circuit not representing a fire hazard		P
	For components within a circuit not representing a fire hazard 4.6.2 does not apply.		P
4.6.3	Fire enclosures		P
4.6.3.1	General	Considered.	P
	Fire enclosures are used to reduce the risk of fire to the environment, independent of the location where they are installed. A fire enclosure shall be provided for all PECS unless: • the product committee specifies that a fire enclosure is not required; or • there is an agreement between the user and the manufacturer; or • the PECS is intended to be used only in areas without combustible materials and is marked according to 6.3.5.		P
4.6.3.2	Flammability of enclosure materials	Considered.	P
	Materials used for fire enclosures of PECS shall meet the flammability test requirements of 5.2.5.5, except for those portions of the enclosure that enclose only circuits not representing a fire hazard.	Metal enclosure	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Materials are considered to comply without test if, in the minimum thickness used, the material is of flammability class 5VA or better, according to IEC 60695-11-20.	Metal enclosure	N/A
	Metals, ceramic materials, and glass which is heat-resistant tempered, wired or laminated, are considered to comply without test.	Metal enclosure	P
	Materials for components that fill an opening in a fire enclosure shall: • be of at least V-1 class material and no larger than 100 mm in any dimension; or • be of at least V-2 class material and either – not larger than 25 mm in any dimension; or – not larger than 100 mm in any dimension and located at least 100mm from any part that is a source of fire hazard; or • be of at least V-2 class material and there is a barrier or device(s) that forms a barrier made of a V-0 class material between the part and a source of fire hazard; or • comply with a relevant IEC component standard that includes flammability requirements for components that are intended to form part of, or fill openings in, a fire enclosure.		P
	Polymeric materials that serve as the outer enclosure and have surface area greater than 1 m ² or a single dimension larger than 2 m, shall have a maximum flame spread index of 100 as determined by ASTM E162 or ANSI/ASTM E84.	No polymeric materials	N/A
	The manufacturer may provide data from the fire enclosure material supplier to demonstrate compliance with the above requirements. In this case, no further testing is required.	Metal enclosure	P
	Compliance shall be checked by visual inspection and, where necessary, by test.		P
4.6.3.3	Openings in fire enclosures		P
4.6.3.3.1	General	IP55 enclosure	P
4.6.3.3.2	Openings in the top and the side of fire enclosures	No such openings	N/A
	Openings in the top surfaces of fire enclosures shall be designed to prevent an external object falling vertically or at up to 5° from vertically from entering the enclosure in an area that could lead to a fire hazard. This requirement applies to all sides of moveable equipment with no defined top and bottom, unless top and bottom surfaces can be suitably demonstrated in the installation instructions. Compliance shall be checked by test of 5.2.2.2.		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Openings in the top surfaces of fire enclosures not located vertically above or within 5° from vertical of a circuit representing a fire hazard as defined in 4.6.1 are not subject to the test of 5.2.2.2 and can be of any construction if the construction prevents access to parts greater than DVC As with the IP3X probe as detailed in 4.4.3.3. Where a portion of the side of a fire enclosure falls within the area traced out by the 5° angle in Figure 6, the limitations in 4.6.3.3.3 regarding openings in bottoms of fire enclosures also apply to this portion of the side. Compliance shall be checked by visual inspection.		N/A
4.6.3.3.3	Openings in the bottom of fire enclosures	Products mounted on a non-combustible surface provided in user manual.	N/A
	Compliance is checked by inspection or with the hot flaming oil test in 5.2.5.6, in case the fire enclosure is designed differently than as described in this subclause.		N/A
4.6.3.3.4	Doors of covers in fire enclosures		P
	If part of a fire enclosure consists of a door or a cover leading to an operator access area, it shall comply with one of the following requirements: • the door or cover shall be provided with a safety interlock; or • a door or cover, intended to be routinely opened by the user, shall comply with both of the following conditions: – it shall not be removable from other parts of the fire enclosure by the user; and – it shall be provided with a means to keep it closed during normal operation. A door or cover intended only for occasional use by an installer, such as for the installation of accessories, is permitted to be removable provided that the equipment instructions include directions for correct removal and reinstallation of the door or cover. Compliance is checked by inspection.	Equipment instructions include instructions for proper removal and reinstallation of doors or covers	P
4.6.4	Temperature limits		P
4.6.4.1	Internal parts	See table 4.6.4	P
	Equipment and its component parts shall not attain temperatures in excess of those in Table 14 when tested in accordance with the ratings of the equipment. Compliance is checked by test of 5.2.3.10.	See table 4.6.4	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
4.6.4.2	Accessible parts	See table 4.6.4	P
	When surface temperatures of the PECS, close to mounting surfaces, exceed the limit of Table 15, a warning according to 6.3.5 shall be provided.	Not exceed the limit	N/A
4.6.5	Limited power sources	Not limited power sources	N/A
	Where a limited power source is required, the source shall comply with Table 16 or Table 17 as applicable.		N/A
	A limited power source shall comply with one of the following requirements: a) the output is inherently limited in compliance with Table 16; or b) a linear or non-linear impedance limits the output in compliance with Table 16. If a positive temperature coefficient device (e.g. PTC) is used, it shall pass the applicable tests specified in IEC 60730-1; or c) a regulating network limits the output in compliance with Table 16, both with and without a single fault in the regulating network; or d) an overcurrent protective device is used and the output is limited in compliance with Table 17.		N/A
	Compliance to determine the maximum available power is checked by test of 5.2.3.9.		N/A
4.7	Protection against mechanical hazards		P
4.7.1	General		P
	Failure of any component within the PECS shall not release sufficient energy to lead to a hazard, for example, expulsion of material into an area occupied by personnel.		P
4.7.2	Specific requirements for liquid cooled PSCS		N/A
4.7.2.1	General	Air cooled PSCS	N/A
4.7.2.2	Coolant		N/A
	Coolant temperature in operation shall not exceed the limit specified in Table 14.		N/A
	Compliance is checked by inspection and test of 5.2.3.10.		N/A
4.7.2.3	Design requirements		N/A
4.7.2.3.1	General		N/A
	The liquid containment system components shall be compatible with the liquid to be used. Equipment using liquids shall be so constructed that it is unlikely that either a dangerous concentration of these materials or a hazard in the meaning of this standard will be created by condensation,		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	vaporization, leakage, spillage or corrosion during normal operation, storage, filling or emptying. Compliance is checked by inspection. The flexible hoses should be made of material free of conductive contaminants such as carbon.		
4.7.2.3.2	Corrosion requirements		N/A
	All cooling system components shall be suitable for use with the specified coolant. They shall be corrosion resistant and shall not corrode as a result of prolonged exposure to the coolant and/or air. Compliance is checked by inspection.		N/A
4.7.2.3.3	Tubing, joints and seals		N/A
	Cooling <i>system</i> tubing, joints and seals shall be designed to prevent leakage during excursions of pressure over the life of the equipment. The entire cooling <i>system</i> including tubing shall satisfy the requirements of the hydrostatic pressure test of 5.2.7.		N/A
4.7.2.3.4	Provision for condensation		N/A
	Where internal condensation occurs during normal operation or maintenance, measures shall be taken to prevent degradation of insulation. In those areas where such condensation is expected, clearance and creepage distances of Table 10 and Table 11 shall be evaluated at least for a pollution degree 3 environment (see Table 8), and provision shall be made to prevent accumulation of water (for example by providing a drain). Compliance is checked by inspection.		N/A
4.7.2.3.5	Leakage of coolant		N/A
	During a leakage measures has to ensure that coolant will not result in wetting of live parts or electrical insulation.		N/A
4.7.2.3.6	Loss of coolant		N/A
	Loss of coolant form the cooling system shall not result in thermal hazards, explosion, or shock hazard. The requirements of the Loss of coolant test of 5.4.3.9.4 shall be satisfied.		N/A
4.7.2.3.7	Conductivity of coolant		N/A
	When the coolant is intentionally in contact with live parts (for example non-earthed heatsinks), the conductivity of the coolant shall be continuously monitored and controlled, in order to avoid hazardous current flow through the coolant.	Not contact with live parts	N/A
4.7.2.3.8	Insulation requirements for coolant hoses		N/A
	When the coolant is intentionally in contact with live		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	parts (for example non-earthed heatsinks), the coolant hoses form a part of the insulation system. Depending on the location of the hoses, the requirements of 4.4.7 for functional or simple or protective separation shall be applied where relevant.		
4.8	Equipment with multiple sources of supply	Main power circuit and auxiliary power circuit	P
	Equipment with more than one supply; design shall be: - separate means of connection are provided for different circuits; and - supply plug connections, if any, are not interchangeable if a hazard could be created by incorrect plugging; and - hazards, within the meaning of this standard, shall not be present under normal or single fault conditions due to the presence of multiple sources of supply. Actions such as disconnection or de-energizing of a supply are considered a normal condition. Compliance is checked by the evaluation of 4.2		P
	Examples of the types of hazards that should be considered are: a) Backfeed prevention – preventing voltage or energy available within the PECS or one of its sources from being fed back to any of the input terminals for another source, either directly or by a leakage path. b) Protection against unintentional islanding. c) Touch current levels may be higher with multiple sources connected simultaneously. d) Hazard resulting from damage to one or more connected sources due to energy from another source, for example the mains. e) Damage to wiring due to currents higher than the wiring is designed for flowing from another source.		P
4.9	Protection against environmental stresses		P
	The manufacturer has to specify the following conditions for operation, storage and transportation according to IEC 60721: - Coolant temperature (min/max); - Ambient temperature (min/max); - Humidity (min/max) - Pollution degree; - Vibration;	Considered.	

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- U.V. resistance; - Over voltage category (OVC); - Altitude for thermal consideration, if rated for operation above 1000 m; - Altitude for insulation coordination considerations, if rated for operation above 2000 m.		
	The manufacturer shall state the environmental service condition for the PECS according to Table 18.	The manufacturer states the environmental service condition for the PECS according to Table 18.	P
4.10	Protection against Sonic Pressure Hazards		P
4.10.1	General		P
4.10.2	Sonic pressure and sound level	See below.	P
	If the measured sound pressure exceeds 70 dBA (except that sounds from alarms are not included) the documentation shall provide information regarding the sound level of the equipment.	Sound level information provided in the user manual	P
4.11	Wiring and connections		P
4.11.1	General		P
	The wiring and connections between parts of the equipment and within each part shall be protected from mechanical damage during installation. The insulation, conductors and routing of all wires of the equipment shall be suitable for the electrical, mechanical, thermal and environmental conditions of use. Conductors which are able to contact each other shall be provided with insulation rated for the DVC requirements of the relevant circuits. The compliance with 4.11.2 to 4.11.8 shall be checked by inspection (see 5.2.1) of the overall construction and datasheets if applicable.	The wiring and connections between parts of the equipment and within each part is protected from mechanical damage during installation.	P
4.11.2	Routing	Considered.	P
	A hole through which insulated wires pass in a sheet metal wall within the enclosure of the equipment shall be provided with a smooth, well-rounded bushing or grommet or shall have smooth, well-rounded surfaces upon which the wires bear to reduce the risk of abrasion of the insulation.		P
	Wires shall be routed away from sharp edges, screw threads, burrs, fins, moving parts, drawers, and similar parts, which abrade the wire insulation. The minimum bend radius specified by the wire manufacturer shall not be violated.	Wires are routed away from sharp edges, screw threads, burrs, fins, moving parts, drawers, and similar parts.	P
	Clamps and guides, either metallic or non-metallic, used for routing stationary internal wiring shall be provided with smooth, well-rounded edges. The	Clamps and guides are provided with smooth, well-rounded edges.	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	camping action and bearing surface shall be such that abrasion or deformation of the insulation does not occur. If a metal clamp is used for conductors having thermoplastic insulation less than 0,8 mm thick, non-conduction mechanical protection shall be provided.		
4.11.3	Colour coding	Considered.	P
	Insulated conductors, other than those which are integral of ribbon cable or multi-cord signal cable, identified by the colour green with or without one or more yellow stripes shall only be used for protective bonding.	Yellow-green line provided in the user manual	P
4.11.4	Splices and connections	Considered.	P
	All splices and connections shall be mechanically secured and shall provide electrical continuity. Electrical connections shall be soldered, welded, crimped, or otherwise securely connected. A soldered joint, other than a component on a PWB, shall additionally be mechanically secured. <i>NOTE Stranded wire should not be consolidated with solder where secured in a terminal that relies on pressure for contact or equivalent</i> When stranded internal wiring is connected to a wire-binding screw, the construction shall be such that loose strands of wire do not contact: • other uninsulated live parts not always of the same potential as the wire; • de-energized metal parts. When screw terminal connections are used, the resulting connections may require routine maintenance (tightening). Appropriate reference shall be made in the maintenance manual (see 6.5.1).	Fulfil requirements	P
4.11.5	Accessible connections	Considered.	P
	In addition to measures given in 4.4.6.4 it shall be ensured that neither insertion error nor polarity reversal of connectors can lead to a voltage on an accessible connection higher than the maximum of DVC As. This applies for example to plug-in sub-assemblies or other plug-in devices which can be plugged in without the use of a tool or key or which are accessible without the use of a tool or key. This does not apply to equipment intended to be installed in restricted access areas. If relevant, non-interchangeability and protection against polarity reversal of connectors, plugs and socket outlets shall be confirmed by inspection and trial insertion.	Considered.	P
4.11.6	Interconnections between parts of the PSCS	Considered.	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	In addition to complying with the requirements given in 4.11.1 to 4.11.5, the means provided for the interconnection between parts of the PECS shall comply with the following requirements or those of 4.11.7. Cable assemblies and flexible cords provided for interconnection between sections of equipment or between units of a system shall be suitable for the service or use involved. Cables shall be protected from physical damage as they leave the enclosure and shall be provided with mechanical strain relief. Misalignment of male and female connectors, insertion of a multipin male connector in a female connector other than the one intended to receive it, and other manipulations of parts which are accessible to the operator shall not result in mechanical damage or a risk of thermal hazards, electric shock, or injury to persons. When external interconnecting cables terminate in a plug which mates with a receptacle on the external surface of an enclosure, no risk of electric shock shall exist at accessible contacts of either the plug or receptacle when disconnected. <i>NOTE An interlock circuit in the cable to de-energize the accessible contacts whenever an end of the cable is disconnected meets the intent of these requirements.</i>	Fulfil requirements	P
4.11.7	Supply connections	Considered.	P
	The connection points provided shall be of appropriate construction to preclude the possibility of loose strands reducing the spacing between conductors when careful attention is paid to installation.	The connection points provided is of appropriate construction to preclude the possibility of loose strands reducing the spacing between conductors when careful attention is paid to installation.	P
4.11.8	Terminals		P
4.11.8.1	Construction requirements	Considered.	P
	All parts of terminals which maintain contact and carry current shall be of metal having adequate mechanical strength. Terminal connections shall be such that the conductors can be connected by means of screws, springs or other equivalent means so as to ensure that the necessary contact pressure is maintained. Terminals shall be so constructed that the conductors can be clamped between suitable surfaces without any significant damage either to conductors or terminals. Terminals shall not allow the conductors to be displaced or be displaced themselves in a manner detrimental to the operation of equipment and the	All parts of terminals which maintain contact and carry current is of metal having adequate mechanical strength.	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	insulation shall not be reduced below the rated values. The requirements of this subclause are met by using terminals complying with IEC 60947-7-1 or IEC 60947-7-2, as appropriate.		
4.11.8.2	Connecting capacity	Considered.	P
	Terminals shall be provided which accommodate the conductors specified in the installation and maintenance manuals (see 6.3.6.4) and cables in accordance with the wiring rules applicable at the installation. The terminals shall meet the temperature rise test of 5.2.3.10.	Terminals is provided which accommodate the conductors specified in the installation and maintenance manuals (see 6.3.6.4) and cables in accordance with the wiring rules applicable at the installation. The terminals shall meet the temperature rise test of 5.2.3.10.	P
	Information regarding the permitted wire sizes shall be given in the installation manual.	Information regarding the permitted wire sizes is given in the installation manual.	P
4.11.8.3	Connection	Considered.	P
	Terminals for connection to external conductors shall be readily accessible during installation. Sets of terminals for connection to the same input or output shall be grouped together and shall be located in proximity to each other and to the main protective earthing terminal, if any. If the installation instructions provide detail on the proper earthing of the system, the protective earthing terminal need not be placed in proximity to the terminals. Clamping screws and nuts shall not serve to fix any other component although they may hold the terminals in place or prevent them from turning.	Terminals is provided which accommodate the conductors specified in the installation and maintenance manuals (see 6.3.6.4) and cables in accordance with the wiring rules applicable at the installation. The terminals shall meet the temperature rise test of 5.2.3.10.	P
4.11.8.4	Wire bending space for wires 10 mm ² and greater	Fulfil requirements	P
	The distance between a terminal for connection to the main supply, or between major parts of the PECS (for example a transformer), and an obstruction toward which the wire is directed upon leaving the terminal shall be at least that specified in Table 19.	Fulfil requirements	P
4.12	Enclosures		P
4.12.1	General		P
4.12.2	Handles and manual controls		P
	Handles, knobs, grips, levers and the like shall be reliably fixed so that they will not work loose in normal use, if this could result in a hazard. Sealing compounds and the like, other than self-hardening resins, shall not be used to prevent loosening. If handles, knobs and the like are used to indicate the position of switches or similar components, it shall		P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	not be possible to fix them in a wrong position if this could result in a hazard.		
4.12.3	Cast metal		N/A
	Die-cast metal, except at threaded holes for conduit, where a minimum of 6,4 mm thickness is required, shall be: • not less than 2,0 mm thick for an area larger than 155 cm² or having any dimension larger than 150 mm; • not less than 1,2 mm thick for an area of 155 cm² or less and having no dimension larger than 150 mm. The area under evaluation may be bounded by reinforcing ribs subdividing a larger area. Malleable iron or permanent-mould cast aluminium, brass, bronze, or zinc, except at threaded holes for conduit, where a minimum of 6,4 mm thickness is required, shall be: • at least 2,4 mm thick for an area greater than 155 cm² or having any dimension more than 150 mm; • at least 1,5 mm thick for an area of 155 cm² or less having no dimension more than 150 mm. A sand-cast metal enclosure shall be a minimum of 3,0 mm thick except at locations for threaded holes for conduit, where a minimum of 6,4 mm is required.		N/A
4.12.4	Sheet metal		P
4.12.5	Stability	Fixed appliance	P
	Under conditions of normal use, units and equipment shall not become physically unstable to the degree that they could become a hazard to an operator or to a service person. If units are designed to be fixed together on site and not used individually, the stability of each individual unit is exempt from the requirements of 4.12.5. The requirements of 4.12.5 are not applicable if the installation instructions for a unit specify that the equipment is to be secured to the building structure before operation. Under conditions of operator use, a stabilizing means, if needed, shall be automatic in operation when drawers, doors, etc., are opened. During operations performed by a service person, the stabilizing means, if needed, shall either be automatic in operation, or a marking shall be provided to instruct the service person to deploy the stabilizing means. Compliance is checked by test of 5.2.2.5.	Fixed appliance	P
5	TEST REQUIRMENTS		P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.1	General		P
5.1.1	Test objectives and classification		P
5.1.2	Selection of test samples		P
5.1.3	Sequence of tests	Considered.	P
5.1.4	Earthing conditions	Considered.	P
5.1.5	General conditions for tests		P
5.1.5.1	Application of tests		P
	Unless otherwise stated, upon conclusion of the tests, the equipment need not be operational.		P
5.1.5.2	Test samples		
5.1.5.3	Operating parameters for tests	Considered.	P
5.1.6	Compliance		P
5.1.7	Test overview		P
5.2	Test specifications		P
5.2.1	Visual inspections (type test, sample test and routine test)	Fulfil requirements	P
	Before type testing, a check shall be made that the PECS delivered for the test is as expected with respect to supply voltage, input and output ranges, etc.	Considered.	P
5.2.2	Mechanical tests		P
5.2.2.1	Clearances and creepage distance (type test)		P
	It shall be verified by measurement or visual inspection that the clearance and creepage distances comply with 4.4.7.4 and 4.4.7.5.	See table 4.4.7.4 and 4.4.7.5	P
	Where this verification is impossible to perform, an impulse voltage test (see 5.2.3.2) shall be performed between the considered circuits.		P
5.2.2.2	Non-accessibility test (type test)	IP20 enclosure for electronic compartment	P
	This test is intended to show that live parts, protected by means of enclosures and barriers in compliance with 4.4.3.3, are not accessible.	Considered	P
	This test shall be performed as a type test of the enclosure of a PSCS as specified in IEC 60529 for the enclosure classification for protection against access to hazardous parts.	Considered	P
	Except as noted below: •The test probe for IP3X shall not penetrate the top surface of the enclosure when probed from the vertical direction $\pm 5^\circ$ only.	IP55 enclosure for electronic compartment	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.2.2.3	Ingress protection test (IP rating) (type test)		P
	The claimed IP rating of the enclosure shall be verified. This test shall be performed as a type test of the enclosure of a PSCS as specified in IEC 60529 for the enclosure classification.	IP55 enclosure for electronic compartment	P
5.2.2.4	Enclosure integrity test (type test)		P
5.2.2.4.1	General	Considered	P
	The integrity tests apply to PSCS, and also where PSCS are intended for operation without a further enclosure in restricted access areas. After completion of the integrity test, the PSCS shall pass the tests of 5.2.3.2 and 5.2.3.4 and shall be inspected to confirm that:	Fulfil requirements	P
	- no degradation of any safety-relevant component of the PSCS has occurred.	No degradation of any safety-relevant component of the PSCS has occurred.	P
	- live parts have not become accessible (see 4.4.3.3).	see 4.4.3.3	P
	- enclosures show no cracks or openings which could cause a hazard.	Enclosures show no cracks or openings which could cause a hazard.	P
	- clearances are not less than their minimum permitted values and other insulation is undamaged.	Clearances are not less than their minimum permitted values and other insulation is undamaged	P
	- barriers have not been damaged or loosened.	Barriers have not been damaged or loosened.	P
	- no moving parts which could cause a hazard are exposed.	No moving parts which could cause a hazard are exposed.	P
	The integrity tests shall be performed at the worst case point on representative accessible face(s) of the enclosure.		P
	The PSCS is not required to be operational after testing and the enclosure may be deformed to such an extent that its original IP rating is not maintained.	Extent that its original IP rating is maintained.	P
5.2.2.4.2	Deflection test (type test)		P
5.2.2.4.2.1	General		P
	If requested by 4.12.1 the test in 5.2.2.4.2.2 and 5.2.2.4.2.3 applies, for metallic enclosure, as applicable.		P
5.2.2.4.2.2	Steady force test, 30 N		P
5.2.2.4.2.3	Steady force test, 250 N		P
5.2.2.4.3	Impact test (type test)	Metal enclosure used	N/A
5.2.2.4.4	Drop	≥18kg	N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Transportable equipment ≤ 18 kg Drop three times from 1000 mm on a horizontal surface at locations where they provide the most adverse results.		N/A
5.2.2.4.5	Stress relief	Metal enclosure used	N/A
5.2.2.5	Stability test		P
5.2.2.6	Wall or ceiling mounted equipment	Fixed appliance.	N/A
5.2.2.7	Handles and manual controls securement		P
5.2.3	Electrical tests		P
5.2.3.1	General	See Table 4.4.7.10	P
	The electrical tests described in 5.2.3.2 to 5.2.3.5 are applicable to basic, supplementary and reinforced insulation. Before performing these tests, preconditioning according to 5.2.6.3.1 and 5.2.6.3.2 is required.	Complied.	P
	When performing electrical and preconditioning tests, the preferred procedure is to test the entire equipment; however it is acceptable to test the components or sub-assemblies providing the basic and reinforced insulation. When components or sub-assemblies are tested, test conditions shall simulate the least favourable conditions occurring inside the equipment at the place of installation.	Complied.	P
5.2.3.2	Impulse voltage test (type test and sample test)	See Table 4.4.7.10	P
5.2.3.3	Alternative to Impulse voltage test (type test and sample test)	Impulse voltage test	N/A
	An a.c. or d.c. voltage test according to 5.2.3.4 may be used as an alternative method to the impulse voltage test of 5.2.3.2.	Impulse voltage test	N/A
	For an a.c. voltage test the peak value of the a.c. test voltage shall be equal to the impulse test of Table 25 and applied for three cycles of the a.c. test voltage.	Impulse voltage test	N/A
	For a d.c. voltage test the average value of the d.c. test voltage shall be equal to the impulse test voltage of Table 25 and applied three times for 10 ms in each polarity.	Impulse voltage test	N/A
	See IEC60664-1 clause 6.1.2.2.2 for further information.	Impulse voltage test	N/A
5.2.3.4	A.C. or d.c. voltage test (type test and routine test)		P
5.2.3.4.1	Purpose of test		P
	The test is used to verify that the clearances and solid insulation of components and of assembled PSCS has adequate dielectric strength to resist	Complied.	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	temporary overvoltage conditions.		
5.2.3.4.2	Value and type of test voltage	See Table 4.4.7.10	P
	The values of the test voltage for circuits connected to mains supply are determined from column 2 or 3 of Table 26. The voltage test shall be performed with a sinusoidal voltage at 50 Hz or 60 Hz. If the circuit contains capacitors the test may be performed with a d.c. voltage of a value equal to the peak value of the specified a.c. voltage.	See Table 4.4.7.10	P
5.2.3.4.3	Performing the voltage test	See Table 4.4.7.10	P
	a) Test (1) between accessible conductive part 8connected to earth) and each circuit sequentially (except DVC As circuits). Test voltage according to Table 26, or Table 27, column 2, corresponding to voltage of considered circuit under test. Test (2) between accessible surface (nonconductive or conductive but not connected to earth9 and each circuit sequentially (except DVC As circuits). Test voltage according to Table 26 or Table 27, column 3 (for type test) or column 2 (for routine test), corresponding to voltage of considered circuit under test.	See Table 4.4.7.10	P
	b) Test between each considered circuit sequentially and the other adjacent circuits connected together. Test voltage according to Table 26 or Table 27, column 2, corresponding to voltage of considered circuit under test.	See Table 4.4.7.10	P
	c) Test between DVC As circuit and each adjacent circuit sequentially. Test voltage according to Table 26 or Table 27, column 3 (for type test) or column 2 (for routine test), corresponding to the circuit with the higher voltage. Either the adjacent circuit or the DVC As circuit may be earthed for this test. It is necessary to test functional insulation between PELV and SELV circuits, but it is not necessary to test functional insulation between adjacent PELV or adjacent SELV circuits.	See Table 4.4.7.10	P
5.2.3.4.4	Duration of the a.c. or d.c. voltage test		P
	The duration of the test shall be at least 60 s for the type test and 1 s for the routine test. The test voltage may be applied with increasing and/or decreasing ramp voltage but the full voltage shall be maintained for 60 s and 1 s respectively for type and routine tests.	60s	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.2.3.4.5	Verification of the a.c. or d.c. voltage test	See table 4.4.7.10	P
	The test is successfully passed if no electrical breakdown occurs during the test.	See table 4.4.7.10	P
5.2.3.5	Partial discharge test (type test, sample test)	Inspection of components and material data sheet	N/A
	The partial discharge test shall confirm that the solid insulation (see 4.4.7.8) used in components and subassemblies for protective separation of electrical circuits remains partial-discharge-free within the specified voltage range (see Table 28).		N/A
	This test shall be performed as a type test and a sample test. It may be omitted for insulating materials which are not degraded by partial discharge, for example ceramics. The partial discharge inception and extinction voltage are influenced by climatic factors (e.g. temperature and moisture), equipment self-heating, and manufacturing tolerance. These influencing variables can be significant under certain conditions and shall therefore be taken into account during type testing.		N/A
5.2.3.6	Protective impedance (type test and routine test)	Type test	P
	A type test shall be performed to verify that the current through a protective impedance under normal operating or single-fault conditions does not exceed the values given in 4.4.3.4. The test shall be performed using the circuit of IEC 60990:1999, Figure 4. NOTE IEC 60990 states that the use of a single network for the measurement of a.c. combined with d.c. has not been investigated, but no suggestion is made for measurement in such cases. The value of the protective impedance shall be verified as a routine test.		P
5.2.3.7	Touch current measurement (type test)	System Measured: 0.006mA rms	P
	The touch current shall be measured to determine if the measures of protection need not be taken (see 4.4.4.3.3). The PECS shall be set up in an insulated state without any connection to the earth and shall be operated at rated voltage. Under these conditions, the touch current shall be measured between the means of connection for the PE conductor and the PE conductor itself with the test circuit of Figure 4 of IEC 60990:1999.	Complied.	P
	• For a PSCS to be connected to an earthed neutral system, the neutral of the mains of the test site shall be directly connected to the protective earthing conductor.	Complied.	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	For a PSCS to be connected to an earthed neutral system, the neutral shall be connected through a resistance of 1 kΩ to the protective earthing conductor which shall be connected to each input phase in turn. The highest value will be taken as the definitive result.		N/A
	For a PSCS to be connected to a corner earthed system, the protective earthing conductor shall be connected to each input phase in turn. The highest value will be taken as the definitive result.		N/A
	For a PSCS with a particular earthing system, this system shall operate as intended during the test.		N/A
	If a PSCS is intended to be connected to more than one system network, each of these different system networks (or the worst-case, if that can be determined) shall be used to make the touch current measurement.		N/A
5.2.3.8	Capacitor discharge (type test)		N/A
	The capacitor discharge time as required by 4.4.3.4 may be verified by a type test and/or by calculation taking into account the relevant tolerances.		N/A
5.2.3.9	Limited power source test (type test)	Not limited power source	N/A
	When required by 4.6.5 a limited power circuit shall be tested as below, with the equipment operating under normal operating conditions. In case the limited power source requirement depends on overcurrent protective device(s), the device(s) shall be short-circuited. With the equipment operating under normal operating conditions, a variable resistive load is connected to the parts under consideration and adjusted to obtain a level required limited VA power. Further adjustment is made, if necessary, to maintain the limited VA power for a period specified by 4.6.5. A variable resistive load is connected to the circuit under consideration and adjusted to obtain the limit of apparent power as indicated in Table 16 or Table 17, as applicable. Further adjustment is made, if necessary, to maintain the limit of apparent power for the time period indicated in Table 16 or Table 17, as applicable. The test is passed, if after the test period the available apparent power does not exceed the limits indicated in Table 16 or Table 17, as applicable. In case the limited power source requirement depends on overcurrent protective device(s), the current rating of at least one of the protective device(s) in the current path shall not exceed the		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	limit in Table 17.		
5.2.3.10	Temperature rise test (type test)	See table 4.6.4	P
	If possible the PECS must operate in the worst conditions of the rated power and the output current.		P
	Equipment, in which the heating or cooling quantity depends on the temperature, the temperature measurement must be carried out under the most unfavourable conditions of ambient temperature within the range specified by the manufacturer.	Maximum environment temperature of EUT is 50°C.	P
	The PECS shall be tested with at least 1,2 m of wire attached to each field wiring terminal. The wire shall be of the smallest size intended to be connected to the PECS as specified by the manufacturer for installation. When there is only provision for the connection of bus-bars to the PECS, they shall be of the minimum size intended to be connected to the PECS as specified by the manufacturer, and they shall be at least 1,2 m in length.	Considered	P
	The test shall be maintained until thermal stabilization has been reached. That is, when three successive readings, taken at intervals of 10 % of the previously elapsed duration of the test and not less than 10 min. intervals, indicate no change in temperature, defined as $\pm 1^{\circ}\text{C}$ between any of the three successive readings, with respect to the ambient temperature.	The test is maintained until thermal stabilization has been reached	P
	The temperature of an electrical insulation (other than that of windings) is measured on the surface of the insulation at a point close to the heat source, if a failure of this insulation could cause a hazard. If temperatures of windings are measured by the thermocouple method, the thermocouple shall be located on the surface of the winding assuming the hottest part due to surrounding heat emitting components. See also notes in Table 14.	The temperature of an electrical insulation (other than that of windings) is measured on the surface of the insulation at a point close to the heat source	P
	The maximum temperature attained shall be corrected to the rated ambient temperature of the PSCS by adding the difference between the ambient temperature during the test and the maximum rated ambient temperature.	The maximum temperature attained is corrected to the rated ambient temperature of the PSCS by adding the difference between the ambient temperature during the test and the maximum rated ambient temperature.	P
	No corrected temperature shall exceed the rated temperature of the material or component measured.	No corrected temperature exceeds the rated temperature of the material or component measured.	P
	During the test, thermal cut-out, overload detection functions and devices shall not operate.	During the test, thermal cut-out, overload detection functions and devices is not operated.	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.2.3.11	Protective bonding tests (type tests and routine tests)		P
5.2.3.11.1	General		P
	Each conductive accessible part under consideration shall be tested separately, to determine if the protective equipotential bonding path for that part is adequate to withstand the test current that the bonding path may be subjected to under fault conditions. The circuit under consideration shall be selected from amongst those circuits adjacent to the accessible part under consideration and separated from it by only basic or functional insulation. All of these selected circuits have to be analysed regarding prospective short circuit current and the associated protective element(s): - If the circuit under consideration exceeds the 5 s disconnection time requirement of IEC 60364-4-41, the protective equipotential bonding impedance test of 5.2.3.11.2 and the protective equipotential bonding short circuit test of 5.2.3.11.3 have to be performed. - If the circuit under consideration meets the 5 s disconnection time requirement of IEC 60364-4-41, the protective equipotential bonding short circuit test of 5.2.3.11.3 has to be performed. - If the circuit under consideration meets the disconnection time requirement of IEC 60364-4-41:2005, Table 41.1, as applicable, depending on the earthing system of the installation, no type test is required.	Considered	P
	For pluggable equipment type A only the protective equipotential bonding impedance test of 5.2.3.11.2 have to be performed.	Fixed connection	N/A
5.2.3.11.2	Protective bonding impedance test (type test)		P
5.2.3.11.2.1	Test Conditions		P
	Where required by 4.4.4.2.2 and 5.2.3.11.2.1, the impedance of protective equipotential bonding means shall be checked by passing a test current through the bond for a period of time. The test current is based on the rating of the overcurrent protection for the equipment or part of the equipment under consideration, as follows: • for pluggable equipment type A, the overcurrent protective device is that provided external to the equipment (for example, in the building wiring, in the mains plug or in an equipment rack);	Measured: 1.55mΩ	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	• for pluggable equipment type B and permanently connected equipment, the maximum rating of the overcurrent protective device specified in the equipment installation instructions to be provided external to the equipment; • the rating of the provided overcurrent device for a circuit or part of the equipment for which an overcurrent protective device is provided as part of the equipment.		
5.2.3.11.2.2	Test current, duration, and acceptance criteria:	Sub clause 4.4.4.3 is considered.	P
	a) For PECS with an overcurrent protective device rating of 16 A or less, this test may be omitted, if an impedance not exceeding 0,1 Ω can be demonstrated.		N/A
	b) As an alternative to Table 29, where the time-current characteristic of the overcurrent protective device that limits the fault current in the protective equipotential bonding means is known because the device is either provided in the equipment or fully specified in the installation instructions, the test duration may be based on that specific device's time-current characteristic. The tests are conducted for a duration corresponding to the 200 % current value on the time-current characteristic.		P
	c) For PECS with an overcurrent protective device rating of more than 460 A, calculations or simulations according to IEC 60949 shall be used to show the ability of the prospective short circuit current to fulfil the requirements. The protective equipotential bonding continuity routine test of 5.2.3.11.4 shall be performed to show that the impedance of the protective equipotential bonding means during and at the end of the test shall not exceed the expected value.		N/A
	Acceptance criteria: The test current is 200 % of the overcurrent protective device rating and the duration of the test is as shown in Table 29. The voltage drop in the protective equipotential bonding means, during and at the end of the test, shall not exceed DVC As, as determined from Table 2 and Table 5 with respect to the accessible surface of the enclosure.		P
	After the tests, visual inspection shall show no damage to the <i>protective equipotential bonding</i> means.	After the tests, visual inspection show no damage to the protective equipotential bonding means.	P
5.2.3.11.3	Protective bonding short circuit withstand test (type test)		N/A
	As required by 5.2.3.11.2.1, the short circuit test in 5.2.4.3 shall be performed to ensure that protective bonding has the ability to withstand the prospective		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	short circuit current that it may be subjected to under fault conditions.		
	The testing shall include an individual test of the protective bonding path for each conductive accessible part unless analysis shows that the short circuit withstand capability of the path is adequate, or that the results of one combination are representative of the anticipated results of another combination.		N/A
5.2.3.11.4	Protective bonding continuity test (routine test)	Type test only	N/A
5.2.4	Abnormal operation and simulated faults tests		P
5.2.4.1	General	See table 4.2 and 4.3	P
5.2.4.2	Pass criteria		P
	As a result of the abnormal operation tests, the PSCS shall comply with the following: - there shall be no emission of flame, burning particles or molten metal; - the surgical cotton indicator shall not have ignited; - the earth connection and protective bonding of the PSCS shall not have opened; - doors and cover shall remain in place; - during and after the test, accessible DVC As, SELV and PELV circuits and accessible conductive parts shall not exhibit voltages greater than the time dependent voltages of Figure 1, Figure 2 or Figure 3, as appropriate and shall be separated from live parts at voltages greater than DVC As with at least basic insulation. Compliance shall be checked by the a.c./d.c. insulation test of 5.2.3.4 for basic insulation; - during and after the test, live parts at voltages greater than DVC As shall not become accessible. - components, e.g. busbar supports, used for the mounting of live parts not break away from their initial position, (IEC 62477-1:2012/AMD1:2016) - no conductor shall get pulled out of its terminal connector. (IEC 62477-1:2012/AMD1:2016)	Fulfil requirements	P
	The PSCS is not required to be operational after testing and it is possible that the enclosure can become deformed. Overcurrent protection integral to the PECS, or required to be used with the PECS, is allowed to open.	Fulfil requirements	P
5.2.4.3	Protective bonding short circuit withstand test (type test)		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
5.2.4.3.1	General	Shall be evaluated in end-used system	N/A
	When required by 5.2.3.11.2.1, a protective bonding path shall be subjected to the following short-circuit withstand test.		N/A
5.2.4.3.2	Test conditions		N/A
	The equipment under test shall be supplied with power and the output port shall be operating as intended in 5.2.4.1 prior to closing the switching means that applied will be more severe.		N/A
	The protective bonding short circuit test shall be performed with the PSCS working with light load, unless analysis shows that higher short circuit currents are available under higher loading conditions.		N/A
	A new sample may be used for each short-circuit test.		N/A
5.2.4.3.3	Protective equipotential bonding short-circuit test method		N/A
5.2.4.3.4	Pass criteria		N/A
5.2.4.4	Output Short-circuit test (type test)		P
5.2.4.4.1	Load conditions		P
	The short circuit test shall be performed with the PSCS at full load or light load whichever creates the more severe condition.		P
5.2.4.4.2	Short-circuit test method	DC P + and P - : Short current: 3174A. Duration: 28ms.	P
	In addition to determining compliance with the criteria of 5.2.4.2, this test is used to determine the output short circuit current rating of the port under consideration, in accordance with 4.3.2.3. An oscilloscope or other suitable instrument shall be used to measure the peak current during the test, and to measure or calculate the r.m.s. value of the current.	BMS protection working, no hazards	P
	The value(s) to be recorded and to be provided with the PECS instructions, in accordance with 6.2, are the peak current, and the highest of the r.m.s. current values measured or calculated over a time period as follows: a) for a.c. signals, three cycles of the nominal a.c. frequency for the port under consideration, in which case the value is to be stated as the 3-cycle r.m.s. value; b) for all signals, the duration of the short circuit from the time the short circuit is applied, until the time the		P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	short circuit current is interrupted by a protective device or other mechanism, in which case the value stated is to include the r.m.s. value and the time period in seconds; c) for short circuit tests that result in a continuous non-zero value, the steady-state r.m.s. value, in which case the value is to be stated as a continuous r.m.s value. For PECS with internal short circuit protection according to 4.3.2.3, which protects the output port within some few μs, the requirements in a), b) and c) are not applicable.		
5.2.4.5	Output Overload test (type test)	Considered	P
5.2.4.6	Breakdown of components test (type test)		P
5.2.4.6.1	Load conditions	See table 4.2 and 4.3	P
	The breakdown of a component, identified as a result of the circuit analysis of 4.2, shall be tested with the PSCS at full load or light load whichever creates the more severe condition.	Tested with the PSCS at full load	P
5.2.4.6.2	Application of short-circuit or open-circuit	Short-circuit	P
	The short circuit shall be applied with cable of a cross-section appropriate for the current that normally flows through the component, but no less than 2.5 mm ² . The length of the loop shall be as short as practical to perform the test. Short circuits and open circuits are applied using an appropriate switching device.	Fulfil requirements	P
	Each identified component shall be subjected to only one breakdown of components test unless both open- and short-circuit failure modes are likely in that component.		P
5.2.4.6.3	Test sequence		P
	For the Breakdown of components test, identified components shall be short-circuited or open-circuited, whichever creates the worst hazard, one at a time.	Fulfil requirements	P
5.2.4.7	PWB short-circuit test (type test)	Spacing for functional insulation not less than required value insulation not less than required value	N/A
	On PWBs, functional insulation provided by spacings which are less than those specified in Table 10 and Table 11 (see 4.4.7.7) shall be type tested as described below.		N/A
	The decreased spacings shall be short-circuited one at a time, on representative samples, and the short-circuit shall be maintained until no further damage		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	occurs.		
5.2.4.8	Loss of phase (type test)		N/A
	A multi-phase PSCS shall be operated with each line (including neutral, if used) disconnected in turn at the input. The test shall be performed by disconnecting one line with the power conversion equipment operating at its maximum normal load and shall be repeated by initially energizing the device with on lead disconnected.		N/A
	The test shall continue until terminated by a protective mechanism, a component failure occurs, or the temperature stabilizes.		N/A
	This particular requirement may be simulated for PSCS with rated input current greater than 500 A.		N/A
5.2.4.9	Cooling failure tests (type test)		P
5.2.4.9.1	General and pass criteria		P
	For PSCS having a combination of cooling mechanisms, all relevant tests shall be performed. It is not necessary to perform the tests simultaneously. The test shall continue, - until the temperature stabilizes, in which case the temperature limits of 4.6.4.2 apply; or - until terminated by a protective mechanism or a component failure occurs, in which case the temperature limits of 4.6.4.2 may be exceeded by not more than 5°C. If this is not possible a warning statement shall be provided in the user documentation.	See table 4.2 to 4.3	P
	NOTE The temperature increase of 5 °C with regard to the steady state limits reflect the spread of the burn threshold given in IEC Guide 117.		P
5.2.4.9.2	Inoperative blower motor		N/A
	A PSCS having forced ventilation shall be operated at rated load with fan or blower motor or motors made inoperative, singly or in combination from a single fault, by physically preventing their rotation.		N/A
5.2.4.9.3	Clogged filter	No filter used	N/A
	Enclosed PSCS having filtered ventilation openings shall be operated with the openings blocked to represent clogged filters. The test shall be performed initially with the ventilation openings blocked 50 %. The test shall be repeated under full blocked condition.		N/A
5.2.4.9.4	Loss of coolant		P
	A liquid cooled PSCS shall be operated at rated load. Loss of coolant shall be simulated by draining		P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	the coolant, blocking the flow or disabling the system coolant pump.		
	If the PSCS is shut down due to the operation of a thermal device located inside the coolant, then the test shall be repeated with the coolant drained out of the system.		P
	NOTE: It is presumed that the thermal device will be inoperative if not surrounded by coolant liquid.		P
5.2.4.10	Short time withstand current (I_{cw}) test (type test) (IEC 62477-1:2012/AMD1:2016)		N/A
5.2.4.10.1	General (IEC 62477-1:2012/AMD1:2016)		N/A
	As required in 4.3.5, the short time withstand current test performed as a type test to verify the safety of the PECS. (IEC 62477-1:2012/AMD1:2016)	Not direct connected to mains, for external auxiliary power is considered as not exceeding 10kA	N/A
	Short-circuits are applied in the PECS at locations based on the evaluation in 4.2 so that terminals and other parts in the fault current path are being exposed to the short-circuit current. (IEC 62477-1:2012/AMD1:2016)		N/A
5.2.4.10.2	Short time withstand current test method (IEC 62477-1:2012/AMD1:2016)		N/A
	The input mains supply port terminals provided with a cable with a cross-section as specified for the installation. (IEC 62477-1:2012/AMD1:2016)	Not direct connected to mains, for external auxiliary power is considered as not exceeding 10kA	N/A
	If a switching device is used to initiate the short-circuit or switch the power to the PECS, it not limit the test current. (IEC 62477-1:2012/AMD1:2016)		N/A
	The complete length of the cable (forth and back) approximately 2 m, unless this length is insufficient, in which case the length as short as practical to perform the test. (IEC 62477-1:2012/AMD1:2016)		N/A
	The testing include individual tests for each input mains supply port. (IEC 62477-1:2012/AMD1:2016)		N/A
	The worst case combination of terminals (including neutral and earth) subjected to a short-circuit test. (IEC 62477-1:2012/AMD1:2016)		N/A
	The PECS can be tested unenergized and not operating as intended prior to the short-circuit withstand test, if it can be shown that the test result is not affected. (IEC 62477-1:2012/AMD1:2016)		N/A
	A new sample used for each short-circuit test. (IEC 62477-1:2012/AMD1:2016)		N/A
	Table 37 lists the a.c. current test method as a minimum requirement for PECS. (IEC 62477-1:2012/AMD1:2016)		N/A
5.2.4.10.3	Compliance criteria (IEC 62477-1:2012/AMD1:2016)		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	As a result of the short time withstand current (I_{cw}) test, the PECS comply with the compliance criteria of 5.2.4.2. (IEC 62477-1:2012/AMD1:2016)		N/A
5.2.5	Material tests		N/A
5.2.5.1	General		N/A
	When requested by 4.4.7.8.2, the manufacturer shall test the flammability properties of the materials used for insulating purposes, as defined in 5.2.5.2, 5.2.5.3 and 5.2.5.4. When requested by 4.6.3.2 the manufacturer shall test the flammability properties of the materials used for fire enclosure, as defined in 5.2.5.5.		N/A
5.2.5.2	High current arcing ignition test (type test)	Metal enclosure used.	N/A
5.2.5.3	Glow-wire test (type test)		N/A
	The glow-wire test shall be made under the conditions specified in 4.4.7.8.2 according to IEC 60695-2-10 and IEC 60695-2-13.		N/A
5.2.5.4	Hot wire ignition test (type test – alternative to Glow-wire test)	Metal enclosure used.	N/A
5.2.5.5	Flammability test (type test)	Metal enclosure used.	N/A
5.2.5.6	Flaming oil test (type test)		N/A
5.2.5.7	Test of cemented joints (type test)	No cemented joints	N/A
	When required by 4.4.7.9 representative samples of cemented joints providing protection of type 1 or type 2 as defined in IEC 60664-3:2003 shall be tested as a type test as follows. The samples shall be subjected to the conditioning procedure specified in 5.7 of IEC 60664-3:2003, using the following parameters: for the cold test (5.7.1), a temperature of -25 °C shall be used, and for the rapid change of temperature test (5.7.3): – 25 °C to +125 °C. After the conditioning the samples shall pass the following tests in the prescribed order: a) The mechanical strength of the joint shall be evaluated by loading the joint using the forces anticipated to be present under normal conditions. There shall be no separation of the parts. b) The insulation resistance between the conductive parts separated by the joint shall be measured according to 5.8.3 of IEC 60664-3:2003. c) Cemented joints shall be treated as to be thin sheet material and shall be tested according 4.4.7.8.3.		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	d) The sectioning of the joint shall not show any cracks, voids or separation.		
5.2.6	Environmental tests (type test)		P
5.2.6.1	General	Considered	P
	Compliance is shown by conducting test of 5.2.6.3, 5.2.6.4, 5.2.6.5 and 5.2.6.6 according to Table 30 as applicable for the environmental conditions specified by the manufacture.	fulfil requirements	P
5.2.6.2	Acceptance criteria		P
	The following acceptance criteria shall be satisfied: - no degradation of any safety-relevant component of the PSCS; - no potentially hazardous behaviour of the PSCS during the test; - no sign of component overheating; - no live part shall become accessible; - no cracks in the enclosure and no damaged or loose insulators; - pass routine a.c. or d.c. voltage test 5.2.3.4; - pass protective bonding test 5.2.3.11.2; - no potentially hazardous behaviour when the PSCS is operated following the test.	fulfil requirements	P
5.2.6.3	Climatic tests		P
5.2.6.3.1	Dry heat test (steady state)		P
	To prove the ability of components and equipment to be operated, transported or stored at high temperatures the dry heat (steady state) test shall be performed according to the conditions specified in Table 31.		P
5.2.6.3.2	Damp heat test (steady state)		P
	To prove the resistance to humidity, the PSCS shall be subjected to a Damp heat test (steady state) according to Table 32.		P
5.2.6.4	Vibration test (type test)		P
	To verify the mechanical vibration strength the PECS in combination with its installation shall be evaluated by: a) tests defined in this section according to the conditions specified in Table 33; - or b) calculation or simulation based on tests, as defined in this section, on a representative model of PECS. For PSCS with a mass more than 100 kg, this test may be performed on sub-assemblies.	Performed on sub-assemblies Battery pack Measured: E-MATE-16-QC was performed in Shenzhen TCT Testing Technology Co., Ltd. Report No.: TCT260228B007 Vibration test for High-voltage box was performed in Jiangsu Hazure Electronic Technology Co., Ltd..	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	NOTE For large equipment, the possibility of using a shock test as an alternative to a vibration test is under consideration.		
5.2.6.5	Salt mist (type test)		N/A
	To verify the resistance against salt mist, the PECS in combination with its installation shall be evaluated by tests defined in this section according to the conditions specified in Table 34. For PSCS with a mass more than 100 kg, this test may be performed on sub-assemblies.	Not use near marine environment.	N/A
5.2.6.6	Dust and sand (type test)		N/A
	To verify the mechanical strength against dust and sand the PECS in combination with its installation shall be evaluated by tests defined in this section under the conditions specified in Table 35. For PSCS with a mass more than 100 kg, this test may be performed on sub-assemblies.		N/A
5.2.7	Hydrostatic pressure (type test and routine test)	Air cooled	N/A
	For type tests, the pressure inside the cooling system of a liquid cooled PSCS (see 4.7.2.3.3) shall be increased at a gradual rate until a pressure relief mechanism (if provided) operates, or until a pressure of twice the operating value or 1,5 times the maximum pressure rating of the system is achieved, whichever is the greater. <i>NOTE: for the purpose of this test the coolant pump may be disabled.</i> For routine tests, the pressure shall be increased to the maximum pressure rating of the system. The pressure shall be maintained for at least one minute. There shall be no thermal, shock, or other hazard resulting from the test. There shall be no significant leakage of coolant or loss of pressure during the test, other than from a pressure relief mechanism during a type test. After the hydrostatic pressure type test the PSCS shall pass the a.c. or d.c. voltage test 5.2.3.4.		N/A
6	INFORMATION AND MARKING REQUIREMENTS		P
6.1	General		P
6.2	Information for selection (IEC 62477-1:2012/AMD1:2016)		P
	- the name or trademark of the manufacturer, supplier or importer;	See copy of marking plate	P
	- catalogue number or equivalent;	See copy of marking plate	P
	- electrical ratings for each power port: - maximum nominal input voltage;	See copy of marking plate	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- maximum nominal output voltage; - maximum nominal output current or nominal output power rating; - maximum nominal input current rms for dimensioning overload protective elements and wiring; - number of phases (e.g. 3 a.c.); - nominal frequency range (e.g. 50 Hz to 60 Hz); - protective class (I, II, III);		
	- the type of electrical supply system (e.g. TN, IT) to which the PECS may be connected;	Only for auxiliary power supply	P
	- short-circuit current rating(s) in terms of: - conditional short-circuit current (I_{cc}) and minimum required prospective short-circuit current $I_{cp,mr}$ and the characteristics of the short-circuit protective device according to clause 4.3.2.2, or rated short time withstand current (I_{cw}), duration and the rated peak withstand current (I_{pk}) according to 4.3.5.	External auxiliary power is considered as not exceeding 10kA	N/A
	- output short-circuit current in accordance with 4.3.2.3;		P
	- supply requirements of the load (if applicable);		N/A
	- liquid coolant type and design pressure for liquid cooled PECS;		N/A
	- IP rating for enclosure;	See copy of marking plate	P
	- operating and storage environment;	Provided in the instruction manual	P
	- reference(s) to relevant standard(s) for manufacture, test, or use;	Provided in the instruction manual	P
	- reference to instructions for installation, use and maintenance.	Provided in the instruction manual	P
6.3	Information for installation and commissioning		P
6.3.1	General	Provided in the instruction manual	P
6.3.2	Mechanical considerations		P
	The following drawings shall be prepared by the manufacturer: - Dimensional drawing, including mass information - Mounting drawing	Fulfil requirements	P
6.3.3	Environment		P
	In accordance with 4.9 the following environmental	Fulfil requirements	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	conditions shall be specified, for operation, transportation and storage:		
	Climatic (temperature, humidity, altitude, pollution, ultra-violet light, etc.)	Fulfil requirements	P
	Mechanical (vibration, shock, drop, topple, etc.)	Fulfil requirements	P
	Electrical (overvoltage category)	Fulfil requirements	P
6.3.4	Handling and mounting		P
	In order to prevent injury or damage, the installation documents shall include warnings of any hazards which can be experienced during installation. Where necessary, instructions shall be provided for: - packing and unpacking; - moving; - lifting; - strength and rigidity of mounting surface; - fastening; - provision of adequate access for operation, adjustment and maintenance.	The installation documents is include warnings of any hazards	P
6.3.5	Enclosure temperature		P
	When surface temperatures of the PECS, close to mounting surfaces, exceed the limit of 4.6.4.2, the installation manual shall contain a warning to consider the combustibility of the mounting surface.	Not exceed the limit	P
	Where required by 4.6.3.1, the following marking shall appear on the PECS and in the installation instructions: "suitable for mounting on concrete or other non-combustible surfaces only".		N/A
6.3.6	Connections		P
6.3.6.1	General		P
	Information shall be provided to enable the installer to make safe electrical connection to the PSCS. This shall include information for protection against hazards (for example, electric shock or availability of energy) that may be encountered during installation, operation or maintenance.	Fulfil requirements	P
6.3.6.2	Interconnection and wiring diagrams		P
	The installation and maintenance manuals shall include details of all necessary connections, together with a suggested interconnection diagram.	The installation and maintenance manuals include details of all necessary connections, together with a suggested interconnection diagram.	P
6.3.6.3	Conductor (cable) selection		P
	The Installation manual shall define the voltage and current levels for all connections to the PSCS, together with cable insulation requirements. These	The Installation manual define the voltage and current levels for all connections to the PSCS,	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	shall be worst-case values, taking into account overcurrent and overload conditions and the possible effects of non-sinusoidal currents.		
6.3.6.4	Terminal capacity and identification		P
	The installation and maintenance manuals shall indicate the range of acceptable conductor sizes and types (solid or stranded) for all terminals, and also the maximum number of conductors which can simultaneously be connected.	The installation and maintenance manuals indicate the range of acceptable conductor sizes and types (solid or stranded) for all terminals	P
	For field wiring terminals, the manuals shall specify the requirements for tightening torque values and also the insulation temperature rating requirements for the conductor or cable.		P
	The identification of all field wiring terminals shall be marked on the PSCS, either directly or by label attached close to the terminals.	The identification of all field wiring terminals is marked on the PECS, either directly or by label attached close to the terminals.	P
	The installation and maintenance manuals identify all external terminals relating to circuits protected by one of the methods of 4.4.6.4.	Fulfil requirements	P
6.3.7	Protection requirements		P
6.3.7.1	Accessible parts circuits		P
	The installation, users and maintenance manuals shall identify any accessible parts at voltages greater than DVC As, and shall describe the insulation and separation provisions required for protection.	The manuals also indicate the precautions to be taken to ensure that the safety of DVC As connections maintained during installation.	P
	The manuals shall also indicate the precautions to be taken to ensure that the safety of DVC As connections maintained during installation.	Fulfil requirements	P
	Where a hazard is present after the removal of a cover, a warning label shall be placed on the equipment. The label shall be visible before the cover is removed.	The manual of a PSCS is state the maximum voltage allowed to be connected to each port.	P
	The manual of a PSCS state the maximum voltage allowed to be connected to each port.	Fulfil requirements	P
	The manuals provide instructions for the use of PELF circuits within a zone of equipotential bonding.	No PELV circuits used	N/A
6.3.7.2	Type of electrical supply system	Only for auxiliary power supply	P
	The installation manual or the PECS specify requirements for safe earthing including the permitted earthing system of the installation (see 4.4.7.1.4)		P
	The unacceptable earthing systems shall be indicated as: - not permitted; or - with modification of values and/or safety levels which		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	shall be quantified through type test.		
6.3.7.3	Protective class		P
6.3.7.3.1	General	Class I	P
	The installation manual of the PECS shall declare the protective class specified for the PECS and the product shall be marked according to the requirement of 6.3.7.3.2, 6.3.7.3.3, and 6.3.7.3.4.	The installation manual of the PECS declares the protective class specified for the PECS	P
6.3.7.3.2	Protective class I equipment		P
	Terminals for connection of the PE conductor shall be clearly and indelibly marked with one or more of the following:		P
	The symbol IEC 60417-5019 (2011-01)	 used for PE terminal	P
	With the letters PE		N/A
	The colour coding green or green-yellow		P
6.3.7.3.3	Protective class II equipment	Class I equipment	N/A
	Equipment of protective class II shall be marked with symbol IEC 60417-5172 (2011-01) (see Annex C). Where such equipment has provision for the connection of an earthing conductor for functional reasons (see 4.4.6.3) it shall be marked with symbol IEC 60417-5018 (2011-01) (see Annex C).	Class I equipment	N/A
6.3.7.3.4	Protective class III equipment	Class I equipment	N/A
	No marking is required on the product.	Class I equipment	N/A
6.3.7.4	Touch current marking		N/A
	Where the touch current in the PE conductor exceeds the limits given in 4.4.4.3.3., this shall be stated in the installation and maintenance manuals. In addition, a warning symbol ISO 7010- W001 (2011-06) (see Annex C) shall be placed on the product, and a notice shall be provided in the installation manual to instruct the user that the minimum size of the PE conductor shall comply with the local safety regulations for high PE conductor current equipment.		N/A
6.3.7.5	Compatibility with RCD marking	No RCD	N/A
	The installation and maintenance manuals shall indicate compatibility with RCDs (see 4.4.8). When 4.4.8 b) applies, a caution notice and the symbol ISO 7010-W001 (2011-06) (see Annex C) shall be provided in the user manual, and the symbol shall be placed on the product. The caution notice shall be the following or equivalent: "This product can cause a d.c. current in the PE conductor. Where a residual current-operated protective device (RCD) is used for protection against electrical shock, only an RCD of Type B is allowed on the supply side of this product."		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	(See 6.4.3 for general requirements for labels, signs and signals.)		
6.3.7.6	Cable and connection		P
	Any particular cable and connection requirements shall be identified in the installation and maintenance manuals.	Any particular cable and connection requirements is identified in the installation and maintenance manuals.	P
6.3.7.7	External protection devices	No external protection devices	N/A
	Where external devices are necessary to protect against hazards, the installation manual shall specify the required characteristics (see also 5.2.4 and 4.3.2.1)		N/A
6.3.8	Commissioning	No Commissioning	N/A
	If commissioning tests are necessary to ensure the electrical and thermal safety of a PSCS, information to support these tests shall be provided for each part of the PSCS. This information can depend on the specific installation, and close cooperation between manufacturer, installer, and user can be required. Commissioning information shall include references to hazards that might be encountered during commissioning, for example those mentioned in 6.4. and 6.5.		N/A
6.4	Information for use		P
6.4.1	General	Considered.	P
	The user's manual shall include all information regarding the safe operation of the PSCS. In particular, it shall identify any hazardous materials and risks of electrical shock, overheating, misuse of the PSCS.	The user's manual include all information regarding the safe operation.	P
	The manual should also indicate any hazards which can result from reasonably foreseeable misuse of the PSCS.		P
6.4.2	Adjustment	Considered.	P
	The user's manual shall give details of all safety-relevant adjustments intended for the user. The identification or function of each control or indicating device and fuse shall be marked adjacent to the item. Where it is not possible to do this on the product, the information shall be provided pictorially in the manual.	Fulfil requirements	P
	Maintenance adjustments may also be described in this manual, but shall be made clear that they should only be made by qualified personnel.	Fulfil requirements	P
	Clear warnings shall be provided where excessive adjustment could lead to a hazardous state of the PSCS.	Fulfil requirements	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Any special equipment necessary for making adjustments shall be specified and described.	Fulfil requirements	P
6.4.3	Labels, signs and signals		P
6.4.3.1	General		P
	Labelling shall be in accordance with good ergonomic principles so that notices, controls, indications, test facilities, fuses, etc., are sensibly placed and logically grouped to facilitate correct and unambiguous identification. All safety related equipment labels shall be located so as to be visible after installation or readily visible by opening a door or removing a cover. Where a symbol is used, the information provided with the PSCS shall contain an explanation of the symbol and its meaning.	Considered.	P
	Labels shall: • wherever possible, use international symbols as given by ISO 3864-1, ISO 7000 or IEC 60417; • if no international symbol is available, be worded in an appropriate language or in a language associated with a particular technical field; • be concise and unambiguous; • be conspicuous, legible and durable; • state the hazards involved and give ways in which risks can be reduced.	Considered.	P
	When instructing the person(s) concerned as to • what to avoid: the wording should include “no”, “do not”, or “prohibited”; • what to do: the wording should include “shall”, or “must”; • the nature of the hazard: the wording should include “caution”, “warning”, or “danger”, as appropriate; • the nature of safe conditions: the wording should include the noun appropriate to the safety device.	Considered.	P
	Safety signs shall comply with ISO 3864-1.		P
	The signal words indicated hereinafter shall be used and the following hierarchy respected: • DANGER to call attention to a high risk, for example: “High voltage”. • WARNING to call attention to a medium risk, for example: “This surface can be hot.” • CAUTION to call attention to a low risk, for example: “Some of the tests specified in this standard involve the use of processes imposing risks on persons concerned.” Danger, warning and caution markings on the PECS shall be prefixed with the word “DANGER”,	Considered.	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	"WARNING", or "CAUTION" as appropriate in letters not less than 3,2 mm high. The remaining letters of such markings shall be not less than 1,6 mm high.		
6.4.3.2	Isolators	No such Isolators	N/A
	Where an isolating device is not intended to interrupt load current, a warning shall state: DO NOT OPEN UNDER LOAD.	No such Isolators	N/A
	The following requirements apply to any supply isolating device which does not disconnect all sources of power to the PSCS.	No such Isolators	N/A
	If the isolating device is mounted in an equipment enclosure with the operating handle externally operable, a warning label shall be provided adjacent to the operating handle stating that it does not disconnect all power to the PSCS.	No such Isolators	N/A
	Where a control circuit disconnecter can be confused with power circuit disconnectors due to size or location, a warning label shall be provided adjacent to the operating handle of the control disconnecter stating that it does not disconnect all power to the PSCS.	No such Isolators	N/A
6.4.3.3	Visual and audible signals	Considered	P
	Visual signals such as flashing lights, and audible signals such as sirens, may be used to warn of an impending hazardous event such as the driven equipment start-up and shall be identified. It is essential that these signals: - are unambiguous; - can be clearly perceived and differentiated from all other signals used; - can be clearly recognized by the user; - are emitted before the occurrence of the hazardous event. It is recommended that higher frequency flashing lights be used for information. Note: IEC 60073 provides guidance on recommended flashing rates and on/off ratios.	Fulfil requirements	P
6.4.3.4	Hot surfaces	Not exceed the limit	N/A
	Where required by 4.6.4.2 the warning symbol W017 of ISO 7010 shall be marked on or adjacent to parts exceeding the touch temperature limits of Table 15.		N/A
6.4.3.5	Equipment marking		P
	The Identification of each control or indicating device and fuse shall be marked adjacent to the item. Replaceable fuses shall be marked with their rating and time characteristics. Where it is not possible to do	Fuses used and not located in operator access areas. The fuse information contains in the maintenance manual.	P

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	this on the product, the information shall be provided pictorially in the manual. Appropriate identification shall be marked on or adjacent to each movable connector. Test points shall be individually marked with the circuit diagram reference. The polarity of any polarized devices shall be marked adjacent to the device. The diagram reference and if possible the function shall be marked adjacent to each pre-set control in a position where it is clearly visible while the adjustment is being made.		
6.5	Information for maintenance		P
6.5.1	General	All below related information provided in the service manual.	P
	The PECS shall be marked with the date code, or serial number from which the date of manufacture can be determined.	Fulfil requirements	P
	Safety information shall be provided in the installation and maintenance manuals including appropriate, the following:	Fulfil requirements	P
	• Preventive maintenance procedures and schedules	Fulfil requirements	P
	• Safety precautions during maintenance	Fulfil requirements	P
	• Location of live parts that can be accessible during maintenance (for example, when covers are removed)	Fulfil requirements	P
	• Adjustment procedures	Fulfil requirements	P
	• Subassembly and component repair and replacement procedures	Fulfil requirements	P
	• Any other relevant information	Fulfil requirements	P
6.5.2	Capacitor discharge		N/A
	When the requirements 4.4.9 are not met, the warning symbol W012 of ISO 7010 and an indication of the discharge time (for example, 45 s, 5 min) shall be placed in a clearly visible position on the enclosure, the capacitor protective barrier, or at a point close to the capacitor(s) concerned (depending on the construction). The symbol shall be explained and the time required for the capacitors to discharge after the removal or the power from the PSCS shall be stated in the installation and maintenance manuals.		N/A
6.5.3	Auto restart/bypass connection		N/A
	If a PSCS can be configured to provide automatic restart or bypass connection, the installation, user and maintenance manuals shall contain appropriate warning statements.		N/A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

IEC 62477-1			
Clause	Requirement + Test	Result - Remark	Verdict
	A PSCS which is set to provide automatic restart or bypass connection, after the removal of power, shall be clearly identified at the installation.		N/A
6.5.4	Other hazards	Considered.	P
	The manufacturer shall identify any components and materials of a PSCS which require special procedures to prevent hazards.		P
6.5.5	Equipment with multiple sources of supply		P
	In accordance with 4.8, where there is more than one source of supply energizing the PSCS, information shall be provided to indicate which disconnect device or devices are required to be operated in order to completely isolate the equipment.		P

Annex 1: Constructional Data Form (CDF)

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

Annex 2: Test records

4	TABLE: Electrical Data (in normal conditions)						P
Type	DC side			AC side			
	U (V) DC	I (A) DC	P (W) DC	U (V) AC	I (A) AC	P (kW) AC	
Charge Model: E-MATE 128-A	397.999	178.743	71139.668	-	-	-	
	457.008	178.996	81802.41	-	-	-	
Discharge Model: E-MATE 128-A	425.589	178.854	76118.281	-	-	-	
	366.234	178.998	65555.094	-	-	-	
Charge Model: E-MATE 80-A	248.034	178.695	44322.436	-	-	-	
	285.438	178.995	51091.975	-	-	-	
Discharge Model: E-MATE 80-A	265.714	178.904	47537.297	-	-	-	
	229.012	178.997	40992.461	-	-	-	
Supplementary information:							

4.4.4.3.3 /RD	TABLE: Touch current measurement			P
Measured between:		Measured (mA)	Limit (mA)	Comments/conditions
Enclosure to PE		0.006 rms	0.5 mA rms	Pass
Supplementary information:				

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

4.2 to 4.3 TABLE: fault condition tests							P
- ambient temperature (°C) :						25 °C, if not stated otherwise	
No.	component No.	fault	test voltage	test time	fuse No.	fuse current (A)	result
1.	System output (E-MATE 128-A)	S-C	DC 421.598V	60 min	-	350A	The battery stops discharging, BMS protection operation. Short current: 3174A Duration: 28ms The main Fuse disconnected. No damage, no hazard.
2.	One battery pack E-MATE-16-QC combined with one HV control box	Overcharge (current)	DC 46.28V	60 min	-	-	No fire or explosion, overcurrent sensing function of BMS did operate and then charging stopped, all protection function of Rechargeable Li-ion Battery System did operate as intended during the test.
3.	One battery pack E-MATE-16-QC combined with one HV control box	Overcharge (voltage)	DC 59.38V	60 min	-	-	Battery operates normally, until the over-charge protection. No damage, no hazard.
4.	E-MATE 257R	Overload	CC 179A	60 min	-	-	No fire or explosion, the voltage of the measured cells or cell blocks did not exceed the lower limit discharging voltage, all protection function of Rechargeable Li-ion Battery System did operate as intended during the test.
5.	One battery pack E-MATE-16-QC combined with one HV control box	Overheating	DC 53.52V	60 min	-	-	Battery operates normally, until the overheating protection. No hazard.
6.	DC Relay (KM1) (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	The power relay switched off. Cease to output. No hazard.
7.	Current sensor sampling line (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	The current value was abnormal. Communication time out. The power relay switched off. No hazard.
8.	Total voltage sampling line (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	The total voltage value was abnormal. Communication time out. The power relay switched off. No hazard.
BMS board							
9.	MCU(U3) on main board PIN 1 (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	Output control abnormal. The power relay switched off. Cease to output. No hazard.

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

10.	MCU(U3) on main board PIN 1 to VCC (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	Output control abnormal. The power relay switched off. Cease to output. No hazard.
11.	MCU(U3) on main board PIN 12 (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	MCU operate abnormal. The power relay switched off. Cease to output. No hazard.
12.	MCU(U3) on main board PIN 12 to VCC (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	MCU operate abnormal. The power relay switched off. Cease to output. No hazard.
13.	MCU(U3) on main board PIN 15 (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	Sampling of ambient temperature abnormal. The power relay switched off. Cease to output. No hazard.
14.	MCU(U3) on main board PIN 15 to VCC (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	Sampling of ambient temperature abnormal. The power relay switched off. Cease to output. No hazard.
15.	MCU(U3) on main board PIN 34 (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	Discharge relay control abnormal. The power relay switched off. Cease to output. No hazard.
16.	MCU(U3) on main board PIN 34 to VCC (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	Discharge relay control abnormal. The power relay switched off. Cease to output. No hazard.
17.	MCU(U3) on main board PIN 39 (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	Communication abnormal. The power relay switched off. Cease to output. No hazard.
18.	MCU(U3) on main board PIN 39 to VCC (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	Communication abnormal. The power relay switched off. Cease to output. No hazard.

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

19.	MCU(U3) on main board PIN 66 (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	Charge relay control abnormal. The power relay switched off. Cease to output. No hazard.
20.	MCU(U3) on main board PIN 66 to VCC (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	Charge relay control abnormal. The power relay switched off. Cease to output. No hazard.
21.	MCU(U3) on main board PIN 91 (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	Pre-charge voltage control abnormal. The power relay switched off. Cease to output. No hazard.
22.	MCU(U3) on main board PIN 91 to VCC (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	Pre-charge voltage control abnormal. The power relay switched off. Cease to output. No hazard.
23.	CANH to CANL (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	CAN communication abnormal. The power relay switched off. No hazard.
24.	IC (UA8) on main board PIN1 to VCC (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	Current sampling failure. No damage, no hazard.
25.	IC (UA2) on main board PIN1 to VCC (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	MCU operated abnormal. The power relay switched off. Cease to output. No hazard.
26.	MOS (ISO1) on main board PIN1 to VCC (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	Insulated sampling abnormal. The power relay switched off. No hazard.
27.	Optocouplers (ISO10) on main board PIN1 (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	High-voltage isolated communication abnormal. The power relay switched off. No hazard.

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

28.	Optocouplers (ISO10) on main board PIN1 to PIN2 (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	High-voltage isolated communication abnormal. The power relay switched off. No hazard.
29.	RA134 on main board (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	Total voltage sampling abnormal. The power relay switched off. No hazard.
30.	AFE(UA4) on main board PIN 4 (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	MCU operate abnormal. The power relay switched off. Cease to output. No hazard.
31.	AFE(UA4) on main board PIN 8 (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	MCU operate abnormal. The power relay switched off. Cease to output. No hazard.
32.	AFE(UA4) on main board PIN 14 (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	Charging current sampling abnormal. The power relay switched off. Cease to output. No hazard.
33.	Cell voltage sampling line (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	Cell voltage cannot be read correctly. Cease to output. No hazard.
34.	NTC resistor (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	Cell temperature cannot be read correctly. Cease to output. No hazard.
		O-C	DC 57.6V	10 min	-	-	Cell temperature cannot be read correctly. Cease to output. No hazard.
35.	Fan (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 24V	10 min	-	-	The system operated normal until over-temperature protect. The power relay switched off. No hazard.
36.	MCU(UM1) on main board PIN 5 (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	MCU operated abnormal. The power relay switched off. Cease to output. No hazard.

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

37.	MCU(UM1) on main board PIN 5 to VCC (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	MCU operated abnormal. The power relay switched off. Cease to output. No hazard.
38.	MCU(UM1) on main board PIN 10 (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	MCU operated normal. No hazard.
39.	MCU(UM1) on main board PIN 10 to VCC (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	MCU operated abnormal. Cease to output. No hazard.
40.	MCU(UM1) on main board PIN 25 (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	MCU and AFE communication abnormal. Cease to output. No hazard.
41.	MCU(UM1) on main board PIN 25 to VCC (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	MCU and AFE communication abnormal. Cease to output. No hazard.
42.	MCU(UM1) on main board PIN 42 (One battery pack E-MATE-16-QC combined with one HV control box)	O-C	DC 57.6V	10 min	-	-	Fan stop running. The system operated normal until over-temperature protect, The power relay switched off. No hazard.
43.	MCU(UM1) on main board PIN 42 to VCC (One battery pack E-MATE-16-QC combined with one HV control box)	S-C	DC 57.6V	10 min	-	-	Fan stop running. The system operated normal until over-temperature protect, The power relay switched off. No hazard.
44.	Smoke detector	S-C	AC 230V	10 min	-	-	The fault applied during operation, after applied the fault, the System will alarm. No hazard.
45.	Temperature detector	S-C	AC 230V	10 min	-	-	The fault applied during operation, after applied the fault, the System will alarm. No hazard.
Legend							
S-C		short-circuited			O-C		
OL		Over-load			MIS		
RE		Reverse polarity			LP		
					Miss wiring		
					Loss of phase		

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

4.6.4		TABLE: heating temperature rise measurements		P
-	Test voltage (V)	See below		-
-	Test ambient temperature (°C)	See below		-
-	Manufacturer recommend ambient temperature (°C)	-20°C to 50°C		-
Test 1		179A Charging to Max. cell voltage 3.6V and 179A discharging to Min. cell voltage 2.8V, 2 cycles with cooling.		
Test ambient temperature		25.0°C		
Temperature rises locations		Maximum recorded temperature (°C)	Maximum recorded temperature (°C) Correct to 50°C	Maximum temperature Limits (°C)
1.	Internal Ambient	35.43	58.58	-
2.	Enclosure – top	35.78	57.91	75
3.	Busbar	38.52	62.21	-
4.	Mylar	37.28	58.21	130
5.	Enclosure – front	37.04	56.54	75
6.	Enclosure – right	35.49	55.89	75
7.	Internal Ambient	35.58	60.31	-
8.	Circuit breaker – handle	35.07	55.28	75
9.	Circuit breaker – enclosure	55	72.27	75
10.	QF1	37.22	55.94	70
11.	Communication terminal	30.2	53.22	105
12.	Sampling harness	43.53	62.27	105
13.	P- connector	42.86	61.28	85
14.	B+ connector	43.65	62.86	85
15.	Shunt	77.53	98.34	125
16.	Busbar insulating sleeve – orange	58.94	72.95	125
17.	Fuse-350A	61.91	81.62	125
18.	Positive contactor	51.77	74.19	85
19.	pre-charge resistor	31.62	55.84	125
20.	pre-charge contactor	31.56	55.86	85
21.	ACDC switching power supply enclosure	36.62	60.73	70
22.	Signal relay	43.11	67.25	85
23.	Signal connector	31.21	54.35	105
24.	DCDC switching power supply enclosure	31.1	54.06	85
25.	Fuse-6A	33.48	55.14	85
26.	BCU enclosure	33.74	57.1	130
27.	Diode	33.31	54.26	125
28.	Optocoupler	37.48	60.6	130
29.	UA2 on BCU board	34.95	58.58	125
30.	PCB of BCU	33.85	57.65	130

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

31.	U1	39.11	61.78	85
32.	U3	45.48	63.95	85
33.	PCB of BMU	41.09	60.44	130
34.	UA2 on BMU board	42.22	61.71	105
35.	UA6	44.36	61.74	125
36.	Air conditioner external air outlet	48.45	73.45	75
37.	Socket	32.95	57.95	75
38.	Air switch	32.11	57.11	80
39.	Cabinet internal temperature	31.68	56.68	125
40.	Door handle	36.02	61.02	-
41.	Screen	47.11	72.11	75
42.	Smoke detector	29.26	54.26	75
43.	Heat detector	28.36	53.36	80
44.	Aerosol unit	27.49	52.49	80
45.	Emergency Stop Button	29.04	54.04	-
46.	Light strip	29.74	54.74	75
47.	Cabinet enclosure – front	28.5	53.5	75
48.	Cabinet enclosure – right	27.81	52.81	75
Remark:				

Test 2		179A Charging to Max. cell voltage 3.6V and 179A discharging to Min. cell voltage 2.8V, 2 cycles without cooling.		
Test ambient temperature		24.9°C		
Temperature rises locations		Maximum recorded temperature (°C)	Maximum recorded temperature (°C) Correct to 50°C	Maximum temperature Limits (°C)
1.	Internal Ambient	39.63	64.63	-
2.	Enclosure – top	45.64	70.64	75
3.	Busbar	37.59	62.59	-
4.	Mylar	41.82	66.82	130
5.	Enclosure – front	44.4	69.4	75
6.	Enclosure – right	46.16	71.16	75
7.	Internal Ambient	58.77	83.77	-
8.	Circuit breaker – handle	37.39	62.39	75
9.	Circuit breaker – enclosure	60.87	85.87	75
10.	QF1	40.62	65.62	70
11.	Communication terminal	36.83	61.83	105
12.	Sampling harness	53.95	78.95	105
13.	Q- connector	51.75	76.75	85
14.	B+ connector	53.4	78.4	85
15.	Shunt	90.88	115.88	125
16.	Busbar insulating sleeve – orange	67.36	92.36	125

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

17.	Fuse-350A	71.16	96.16	125
18.	Positive contactor	64.76	89.76	85
19.	pre-charge resistor	44.82	69.82	125
20.	pre-charge contactor	45.71	70.71	85
21.	ACDC switching power supply enclosure	52.09	77.09	70
22.	Signal relay	58.77	83.77	85
23.	Signal connector	47.15	72.15	105
24.	DCDC switching power supply enclosure	46.23	71.23	85
25.	Fuse-6A	46.06	71.06	85
26.	BCU enclosure	48.5	73.5	130
27.	Diode	43.7	68.7	125
28.	Optocoupler	50.34	75.34	130
29.	UA2 on BCU board	48.43	73.43	125
30.	PCB of BCU	47.62	72.62	130
31.	U1	51.52	76.52	85
32.	U3	36.34	61.34	85
33.	PCB of BMU	33.16	58.16	130
34.	UA2 on BMU board	34.06	59.06	105
35.	UA6	30.82	55.82	125
36.	Screen	56.88	81.88	75
37.	Air conditioner external air outlet	38.48	63.48	75
38.	Socket	37.23	62.23	75
39.	Air switch	38.08	63.08	80
40.	Cabinet internal temperature	42.91	67.91	125
41.	Door handle	56.73	81.73	-
42.	Screen	34.47	59.47	75
43.	Smoke detector	33.92	58.92	75
44.	Heat detector	32.84	57.84	80
45.	Aerosol unit	33.2	58.2	80
46.	Emergency Stop Button	33.63	58.63	-
47.	Light strip	32.79	57.79	75
48.	Cabinet enclosure – front	32.19	57.19	75
Remark:				

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

4.4.7.4/RD 4.4.7.5/RD 5.2.2.1/RD	TABLE: Clearance and Creepage Distance Measurements						P
	clearance cl and creepage distance dcr at/of:	System / Impulse voltage (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	required dcr (mm)	dcr (mm)
	High Voltage Control Box						
	High voltage control box P+ to PE (BI)	4000Vd.c.	467.2Vdc	5.5*1.29	>30.0	9.5	>30.0
	High voltage control box P- to PE (BI)	4000Vd.c.	467.2Vdc	5.5*1.29	24.5	9.5	>25.0
	High voltage control box P+ to Communicate port(RI)	6000Vd.c.	467.2Vdc	5.5*1.29	>30.0	19	>35.0
	Battery Pack						
	Battery Pack B+ to B- (BI)	4000Vd.c.	467.2Vdc	5.5	>30.0	9.5	>30.0
	Battery Pack B- to PE (BI)	4000Vd.c.	467.2Vdc	5.5	22.7	9.5	>25.0
	Battery Pack B+ to Communicate port(RI)	6000Vd.c.	467.2Vdc	8.0	>30.0	19	>35.0
	BCU (Main Board)						
	Live part to metal enclosure (BI)	4000Vd.c.	467.2Vdc	5.5	>10.8	5.5	>30.9
	Battery/+Battery via terminal (FI)	4000Vd.c.	467.2Vdc	5.5	18.3	5.5	>20.0
	Between Primary to Sec. on IC UA6 on main control board (BI)	4000Vd.c.	467.2Vdc	5.5	11.27	5.5	>12.0
	Power circuit to COM via other insulator(RI)	6000Vd.c.	467.2Vdc	8.0	>12	10.4	>12.0
	BMU (Slave Board)						
	Battery+,- via PCB trace on BMU board to communication(RI)	6000Vd.c.	467.2Vdc	8.0	22.2	10.4	>30.0
	DC circuit to communication circuit (optocoupler ISO1)	6000Vd.c.	467.2Vdc	8.0	23.8	10.4	>30.0
	AC auxiliary power supply (System) AC230V						
	AC auxiliary power supply L to communication(RI)	6000Vd.c.	230Vac	8.0	>30.0	15.0	>30.0
	AC auxiliary power supply L to PE (BI)	4000Vd.c.	230Vac	5.5	>30.0	15.0	>30.0

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

Supplementary information:

FI=functional insulation, BI=basic insulation, SI=supplementary insulation, RI=reinforced insulation.

When determine the clearance:

1. For DC input circuit: OVC II applied, For AC auxiliary power supply input circuit: OVC III applied.
2. PCB with min. CTI 175 used.
3. Interpolation is used, and operating altitude is 4000m max.
4. Requirement about creepage distances for the distance to the metal enclosure come from columns 7 and 8 of Table 11. Requirement about creepage distances for other parts come from column 3 of table 11.

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

4.4.7.10 /RD, 5.2.3/RD	TABLE: electric strength measurements, impulse voltage test and partial discharge test				P
test voltage applied between:		test voltage (V)	impulse withstand voltage (V)	partial discharge extinction voltage (V)	result
DC+ to PE (BI)		960	4000	--	No breakdown
DC- to PE (BI)		960	4000	--	No breakdown
DC+ to Comm (RI)		1900	6000	--	No breakdown
DC- to Comm (RI)		1900	6000	--	No breakdown
AC auxiliary power supply L1 to PE (BI)		2120	4000	--	No breakdown
AC auxiliary power supply L1 to Comm (RI)		4240	6000	--	No breakdown
Supplementary information: BI: Basic insulation, SI: Supplementary insulation, RI: Reinforced insulation					

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

Annex 3: List of equipment

No.	Testing / measuring equipment / material used	Equipment Model	Equipment ID	Last calibration date	Calibration due date
1	Digital multimeter	ST833D	HZ0002	2026-03-26	2027-03-25
2	electronic balance	TCS-600	HZ0010	2026-03-26	2027-03-25
3	Digital thermo-hygrometer	Cos-03	HZ0015	2026-03-26	2027-03-25
4	Withstand Voltage Tester	UC8001C	HZ0043	2026-03-26	2027-03-25
5	DC power supply	CSYJ24-250-6000W	HZ0044	2026-03-26	2027-03-25
6	Data logger	MIK-6000C-48	HZ0048	2026-03-26	2027-03-25
7	Milliohm meter	VC480C+	HZ0057	2026-03-26	2027-03-25
8	Push pull gauge	NK-500	HZ0058	2026-03-26	2027-03-25
9	Vernier caliper	DL91150	HZ0061	2026-03-26	2027-03-25
10	External Short-Circuit Tester	ASTD-DL-15000A	HZ0062	2026-03-26	2027-03-25
11	Leakage Current Tester	GLC-9000	HZ0098	2025-12-05	2026-12-04
12	Vibration Test Table	ES-2a	HZ0100	2026-03-26	2027-03-25
13	Walk-in Temperature & Humidity Chamber	NPV-12500-HF	HZ0108	2026-03-26	2027-03-25
14	Battery Charge-Discharge Test System	GBTSP-1800V/300A2CH	HZ0113	2026-03-26	2027-03-25
15	High Voltage Pulse Tester	HVP-2	HZ0117	2025-07-22	2026-07-21

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

Annex 4: Photos

Model type:

1) E-MATE 80-A, 2) E-MATE 96-A, 3) E-MATE 112-A, 4) E-MATE 128-A



Side view of battery module E-MATE-16-QC



Side view of battery module E-MATE-16-QC


Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001



Battery module E-MATE-16-QC communication port

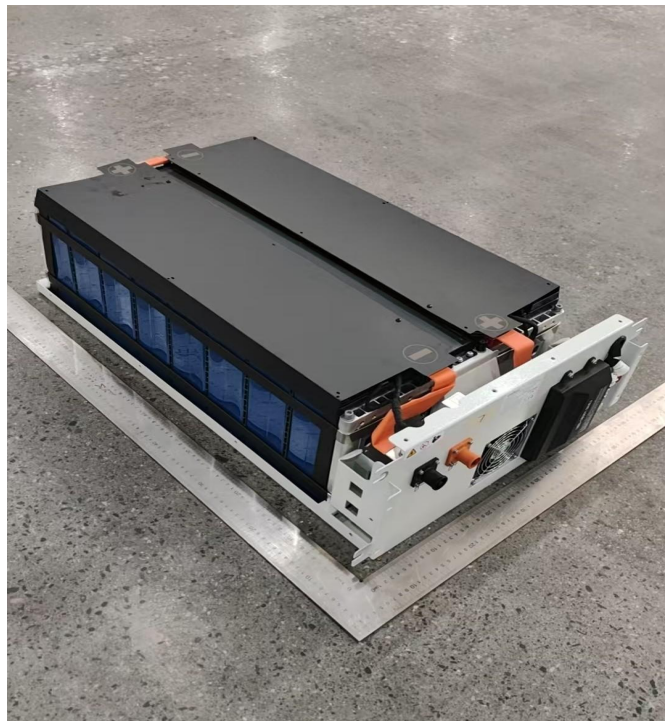

Inside view of the battery module E-MATE-16-QC


Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001



Inside view of the battery module E-MATE-16-QC

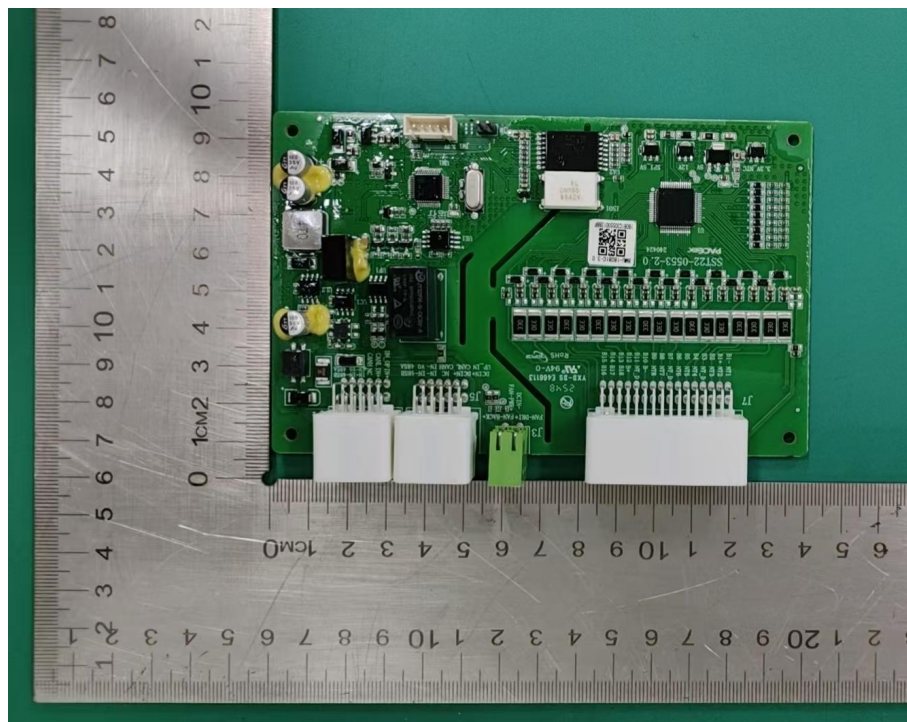


BMU main board of the battery module

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

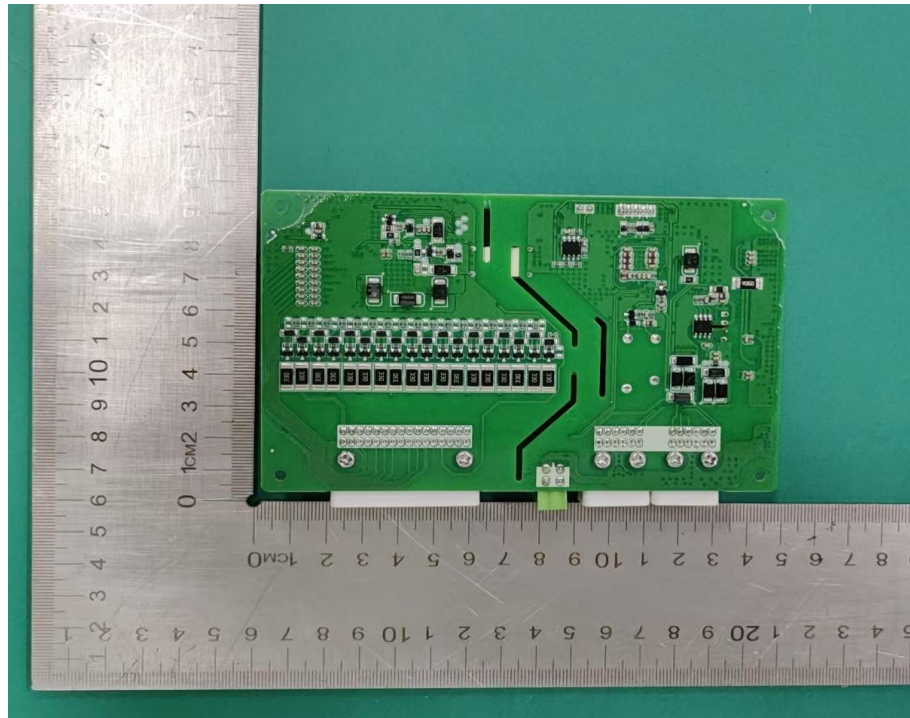

BMU main board of the battery module



Side view of the high-voltage box


Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001



Side view of the high-voltage box

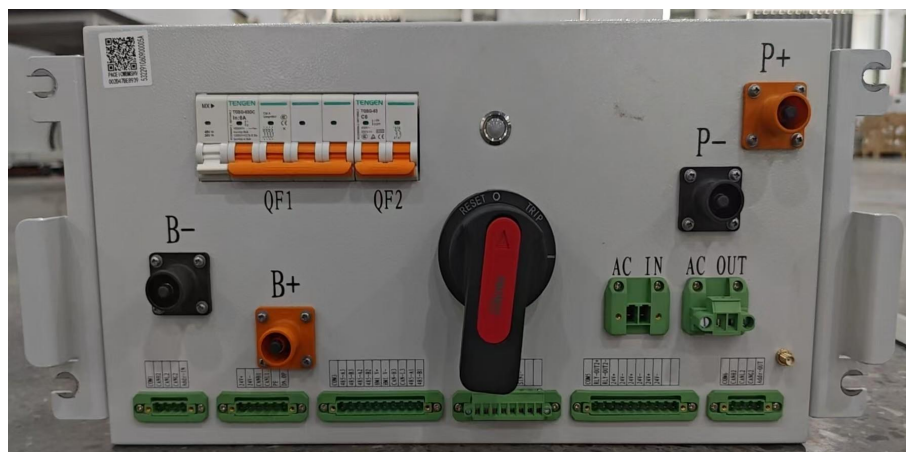


High-voltage box communication port


Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

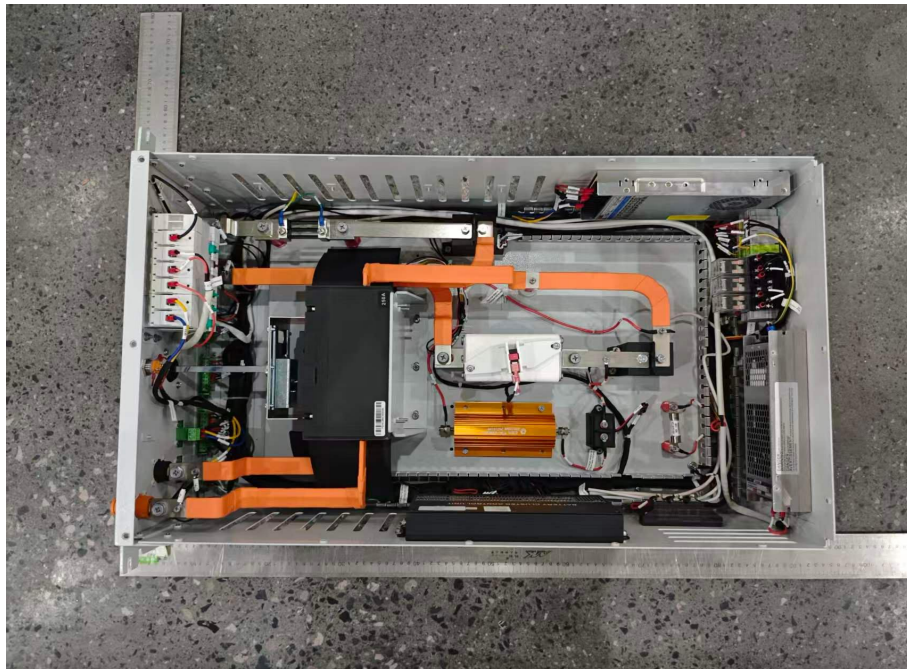

Inside view of the high-voltage box

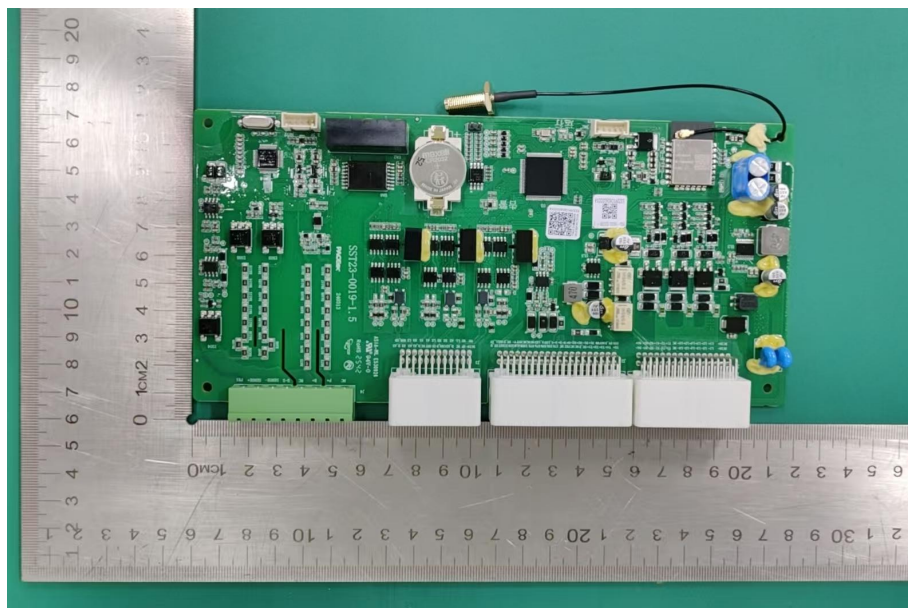


BCU main board of the high-voltage box

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

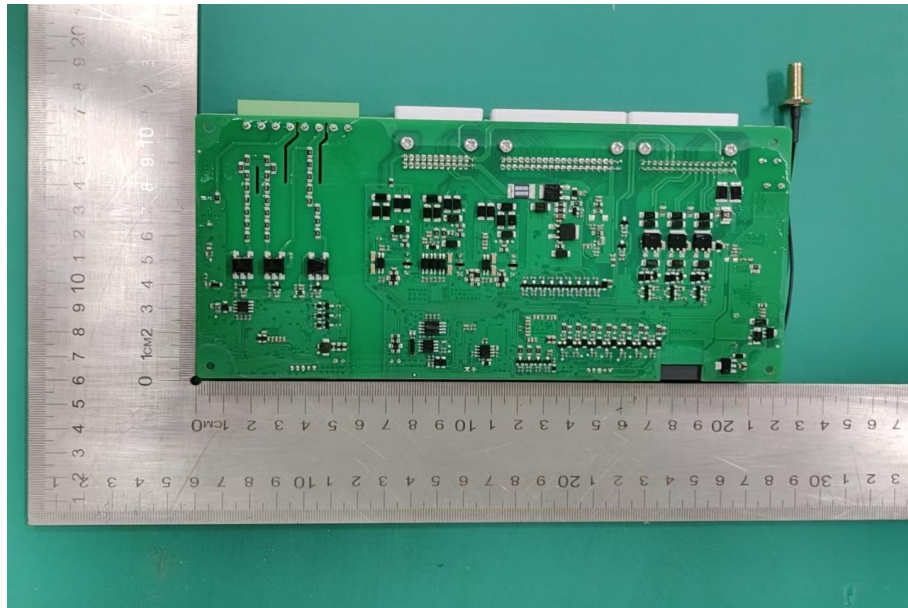

BCU main board of the high-voltage box



Front view of all models of the battery system

Test Report

File No.: PVP02045/25E-002


Test Report No.: 492014271.001




Side view of all models of the battery system



Internal view of all models of the battery system

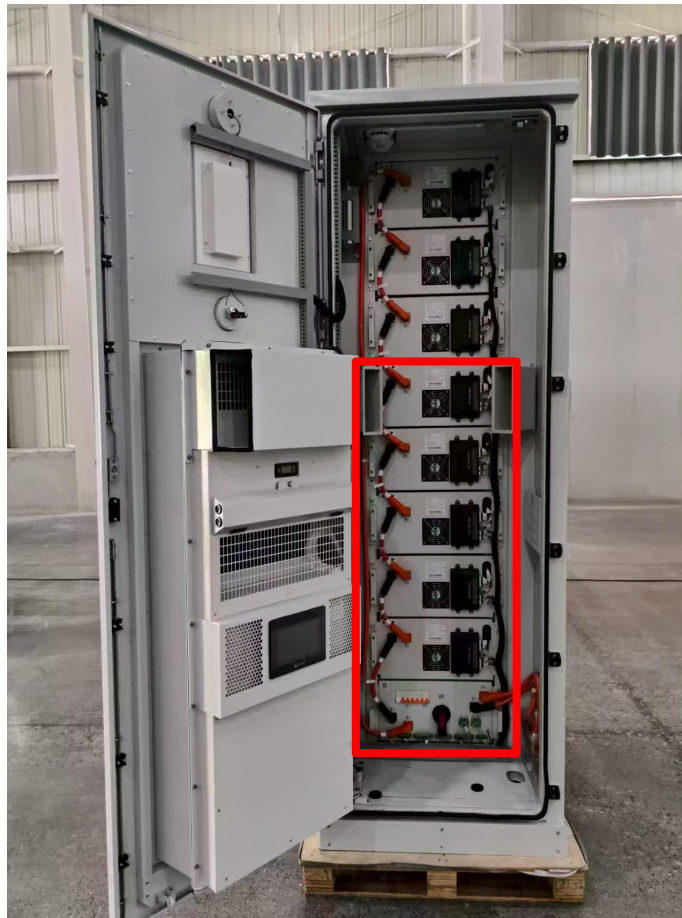

Internal view of the battery system E-MATE 80-A

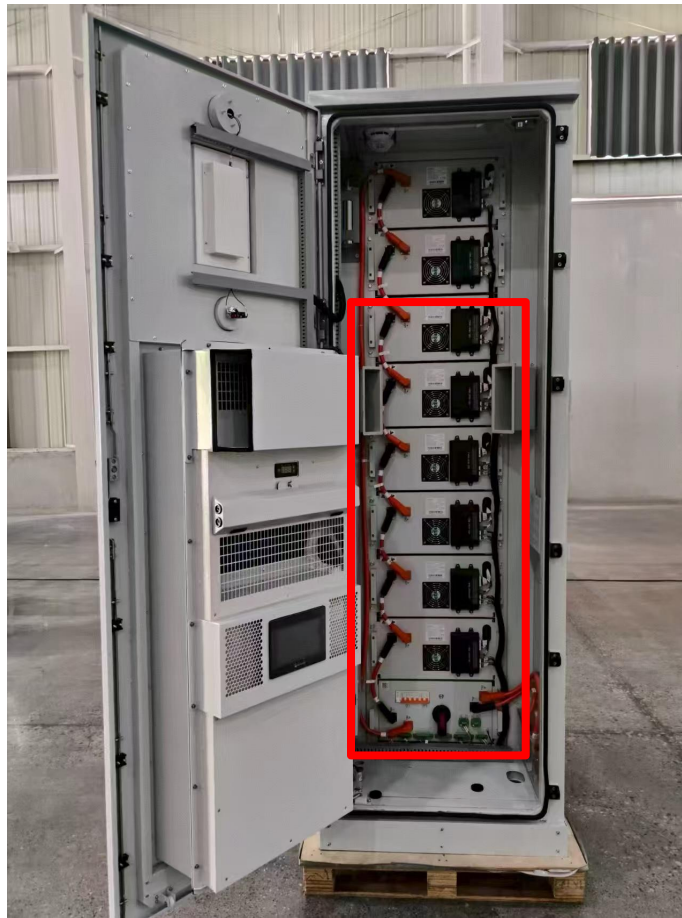


Internal view of the battery system E-MATE 96-A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001

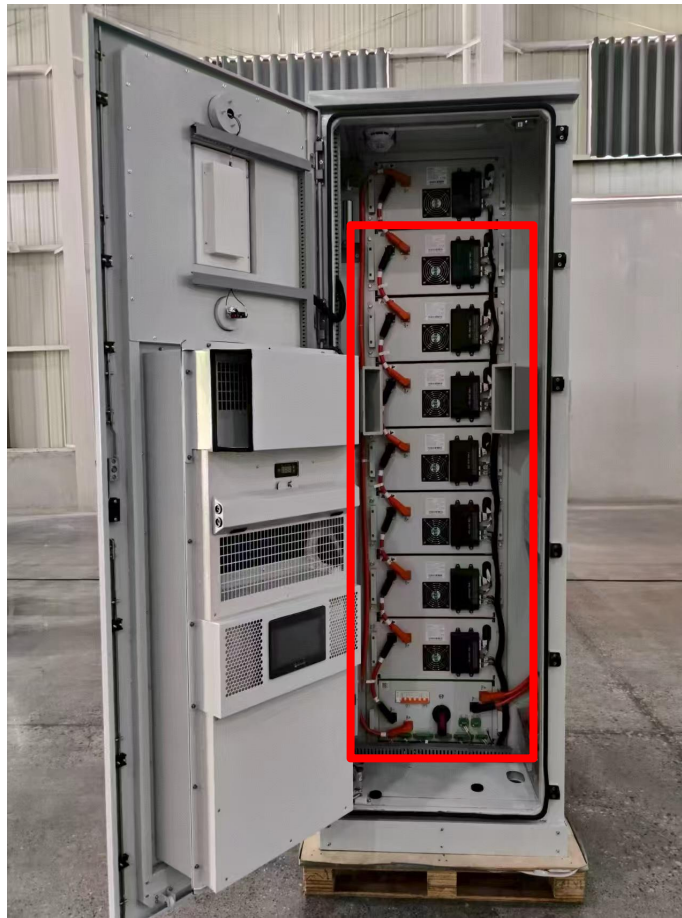

Internal view of the battery system E-MATE 112-A

Test Report

File No.: PVP02045/25E-002

Test Report No.: 492014271.001



Internal view of the battery system E-MATE 128-A

----- End of test report -----